



RF Remote

# COLOR SELECT

## PRODUCT GUIDE

LCS

# INSTRUCTIONS

## FEATURES

- 19 dynamic modes
- 20 static colors
- 256 level PWM
- Adjustable speed
- Adjustable brightness
- Credit card size remote
- Demo mode
- 1 to 1 paired remote
- Auto save function


## INSTALLATION

### 1. Power Supply

IFX's LCS-1RF accepts 12-24VDC. The inner pole polarity is positive and the sleeve is negative. Please insure proper selection of the power supply. illuminFx offers many options, contact for more information.

### 2. LED Output


This unit supports common anode connection from LED products. The black wire from the in line controller is the common voltage wire. All wires must be connected correctly from LED fixtures to ensure correct operation.



### 3. Remote Control

Please remove insulation from battery compartment before using. The RF wireless signal can pass through almost all barriers, so it is not necessary to aim remote directly at the in line controller. However, to ensure communication, do not install the in line controller in a metal enclosure. This controller uses a 3V CR2025 type battery, please replace with the same battery type.

## FUNCTIONS

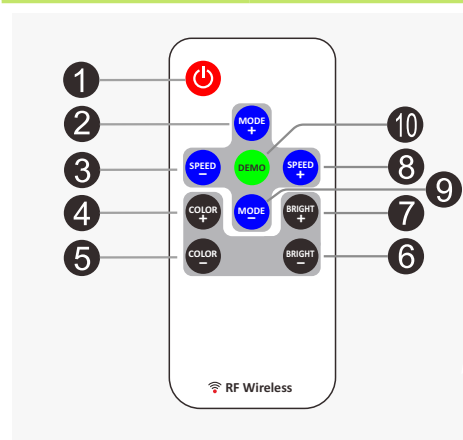

<b>1</b> : Power/Standby	Turns the controller on and off. When powered on, the controller will restore the previous mode or color.
<b>2/9</b> : Dynamic Mode	Switch to Dynamic Mode, or switch between the 19 dynamic modes.
<b>3/8</b> : Dynamic Speed	Adjusts the dynamic speed of the mode currently selected. Increase speed with + (8) and decrease with - (3). Controller will switch to Dynamic Mode if either is pressed.
<b>4/5</b> : Static Color	Switch to Color Mode, or switch between the 20 static colors.
<b>6/7</b> : Brightness	Adjusts the static color brightness. Increase with + (7) and decrease with - (6). Controller will switch to Color Mode if either is pressed.
<b>6/7</b> : Demo Mode	Press this key to switch to Demo Mode. In demo mode, the controller cycles through 9 Dynamic Modes (each will play 3 times).