


SS-JB Connection Method

Installation Guide


BEFORE YOU BEGIN, READ INSTALLATION INSTRUCTIONS THOROUGHLY

INSTALLATION STEPS

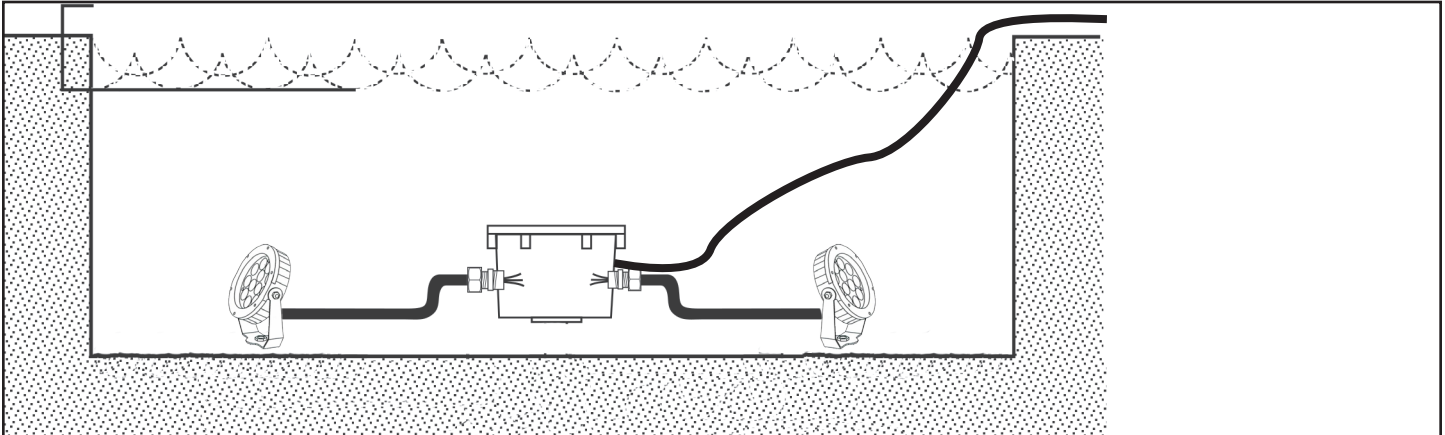

Connect your main power or data line up to the SS-JB. (EX : If using the SS-JB4, wire 3 lighting fixtures into the Junction box). Connect each wire with a wire nut, making sure to maintain the correct polarity. Tighten down each compression fitting to ensure a good seal. It is recommended to then test on dry ground to make sure all the lighting fixtures are working correctly.

1

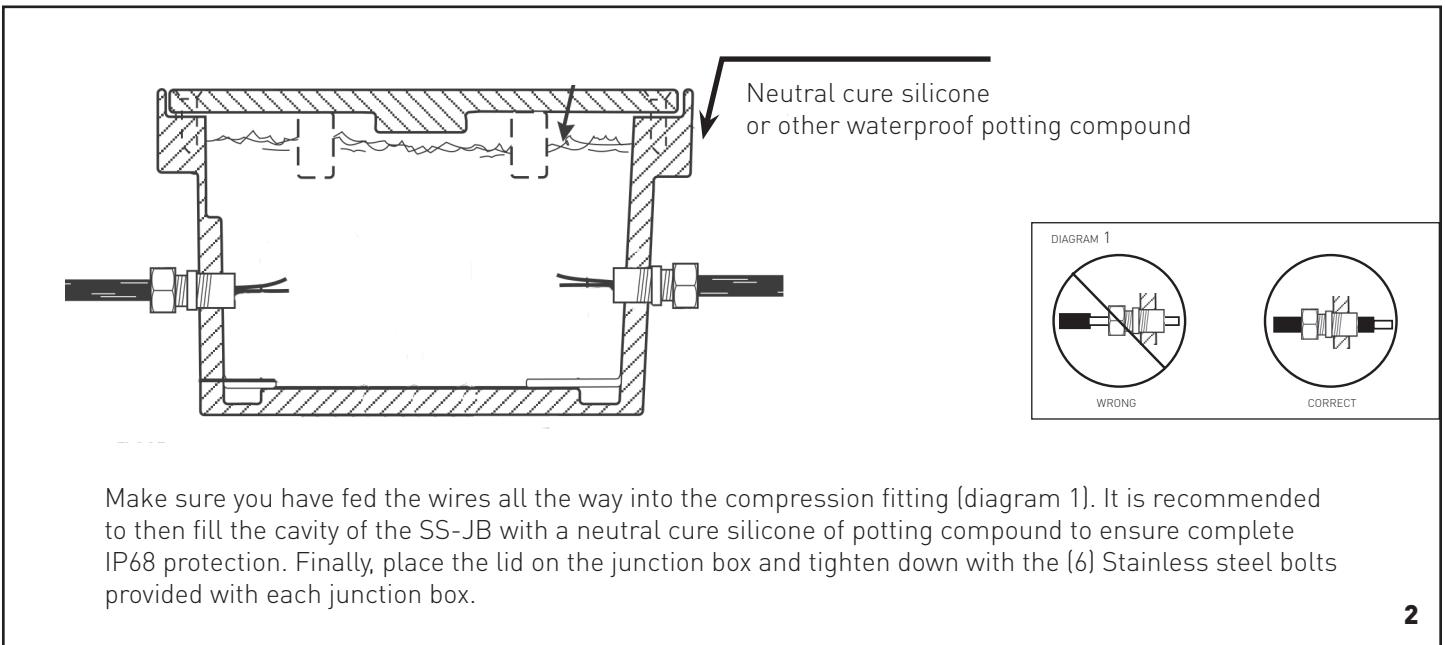

Make sure you have fed the wires all the way into the compression fitting (diagram 1). It is recommended to then fill the cavity of the SS-JB with a neutral cure silicone or potting compound to ensure complete IP68 protection. Finally, place the lid on the junction box and tighten down with the (6) Stainless steel bolts provided with each junction box.

2