


underwater

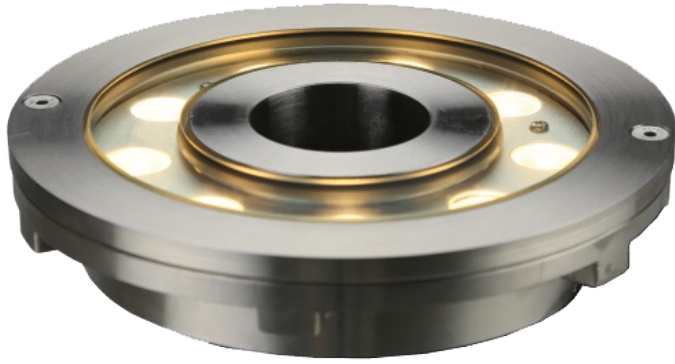

RIO | oslo

SATURN

12/20W LED

FL6



INTERNAL DMX

SATURN FL6 :


The SATURN FL6 Series of LED Fountain Fixtures are specifically designed to be used on outdoor fountains. The FL6 is designed for wet fountain applications. Simply attach the ring to a fountain nozzle and it will evenly illuminate the fountain jet.

- 5-year warranty
- Long life : 30,000 hours | Power Factor : ≥ 0.9
- Internal integrated DMX for easy wiring and installation


SPECIFICATIONS

Housing & Trim Ring	Stainless steel 304
Cable Gland	IP68 imported
Environment	up to 5m depth
Cover Lens	10mm thick tempered glass
LED	CREE High Powered w/optical lens
Driver	Single color —1 circuit RGB 3in1 —3 circuits
Cord	OSLO Warm White —(1)18/2 @ 6ft RIO RGB —(2)18/2 @ 6ft
Cord Termination	OSLO Warm White —(1)Tinned wire ends RIO RGB —(2)Tinned wire ends
Mounting Hole	$\phi 1.97''$

PHOTOMETRICS

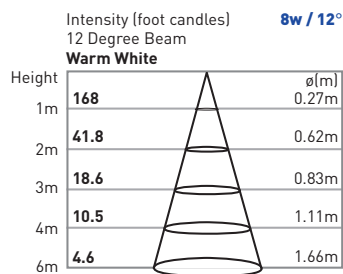

DIMENSIONS

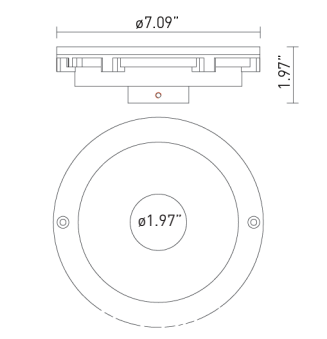

Model Number	LED Array	Input Voltage	Color	Beam Angle	Cord Termination	Max Power	LUM Flux
FL6-L91-1AWA-S-06HW	9 x 1W	12VAC	Warm White 3000K	12°	2-wire	12W	810
FL6-L91-1ACA-S-06HW	9 x 1W	12VAC	Cool White 6000K	12°	2-wire	12W	990
FL6-L92-2DXA-S-06HW	9 x 2W	24VDC	RGB	12°	(2) 2-wire	26W	Variable
FL6-L92-1AWA-S-06HW	9 x 2W	12VAC	Warm White 3000K	12°	2-wire	20W	1606
FL6-L92-1ACA-S-06HW	9 x 2W	12VAC	Cool White 6000K	12°	2-wire	20W	1890



illuminfx

illuminfx reserves the right to make changes to specifications at any time with or without notice

saturn FL6 2015 | © 2015 illuminfx
www.illuminfx.com | 585 - 254 - 8010