

in grade



RIO | oslo

CASPER


24W LED

IG5

SPECIFICATIONS

| | |
|------------------|---|
| Housing | 12" Die cast aluminum, gray powder coat |
| Trim Ring | 316# stainless steel |
| Glass | Step-tempered clear glass T=8mm |
| Lens | Optical lens efficiency ≥85% |
| Cable Gland | IP68 PG-9 PVC |
| Waterproof Seal | EPDM packing w/Silicon rubber gasket |
| LED | T0 power type Single color is OSRAM |
| Driver | Single color —2 circuit RGB 3in1 —6 circuits |
| Cord | 20 ft |
| Cord Termination | OSLO Warm White —Tinned wire ends RIO RGB —Male IP68 Quick-Connect |
| Mounting Sleeve | 057 PVC |
| Loading Capacity | ø ² / ₅ =1728lbs |

DIMENSIONS

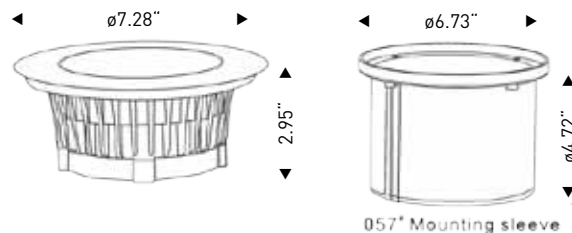


CASPER IG5 :

The Casper IG5 Series of LED In Grade fixtures are perfect for any hardscape illumination application. This high output 24W fixture is great for lighting up larger applications such as building facades, large columns, and trees. Comes with optional PVC mounting sleeve.

- Long life : 50,000 hours
- 5 year warranty

PHOTOMETRICS

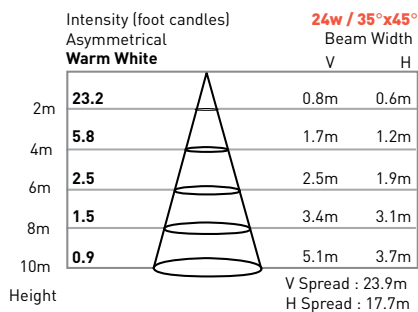

| Model Number | LED Array | Input Voltage | Color | Beam Angle | Cord Termination | Max Power | LUM Flux |
|----------------------|-----------|---------------|------------------|-------------|------------------|-----------|----------|
| IG5-L122-1AW3-S-06HW | 12 x 2W | 12VAC | Warm White 3000K | 30° | 2-wire | 21.4W | 1269 |
| IG5-L122-1AWW-S-20HW | 12 x 2W | 12VAC | Warm White 3000K | ASY 35°x45° | 2-wire | 21.4W | 1269 |
| IG5-L122-2DX3-S-201M | 12 x 2W | 24VDC | RGB | 30° | Male QC Plug | 20W | Variable |
| IG5-L122-2DXW-S-201M | 12 x 2W | 24VDC | RGB | ASY 35°x45° | Male QC Plug | 20W | Variable |



illuminfx reserves the right to make changes to specifications at any time with or without notice

casper IG5 2014 | © 2014 illuminfx
www.illuminfx.com | 585 - 254 - 8010