

in grade

COB oslo

AUSTIN

5W LED

IG8



SPECIFICATIONS

Housing	Die cast aluminum, gray powder coat
Trim Ring	316# stainless steel
Glass	Step-tempered clear glass T=7mm
Loading Capacity	Exert force of Ø $\frac{1}{2}$ =1320 pounds
Lens	Optical lens efficiency $\geq 90\%$
Cable Gland	Molded shaped silicone seal
Waterproof Seal	Molded shaped silicone seal
LED	Multi chip on board LED
Driver	Single color —1 circuit
Cord	6 ft
Cord Termination	OSLO Warm White —Tinned wire ends
Mounting Sleeve	065 PVC




AUSTIN IG8 :


The AUSTIN IG8 Series of LED In Grade fixtures are great for up-lighting applications. The COB LEDs provide even more lumen output per watt so you can get a greater light output in an extremely small lighting fixture. The IG8 series comes in both square and round trim rings.

- 5-year warranty
- Long life : 50,000 hours

PHOTOMETRICS

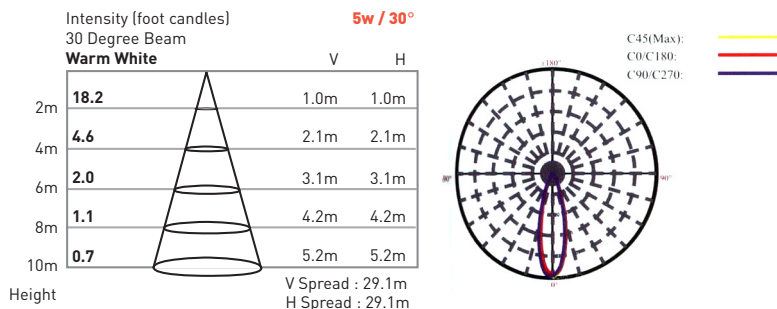

DIMENSIONS

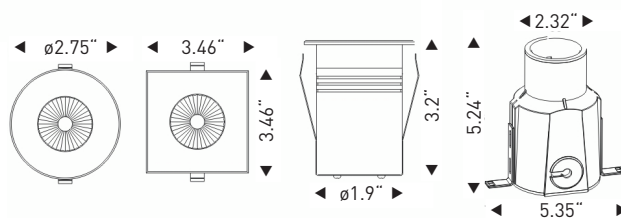

Model Number	LED Array	Input Voltage	Color	Beam Angle	Trim Ring	Max Power	LUM Flux
IG8-L15-1AWC-S-06HW	1 x 5W	12VAC	Warm White 3000K	30°	Round	4.8W	294
IG8S-L15-1AWC-S-06HW	1 x 5W	12VAC	Warm White 3000K	30°	Square	4.8W	294



illuminfx

illuminfx reserves the right to make changes to specifications at any time with or without notice

austin IG8 2015 | © 2015 illuminfx
www.illuminfx.com | 585 - 254 - 8010