
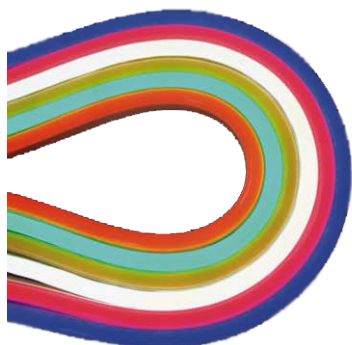


flex light

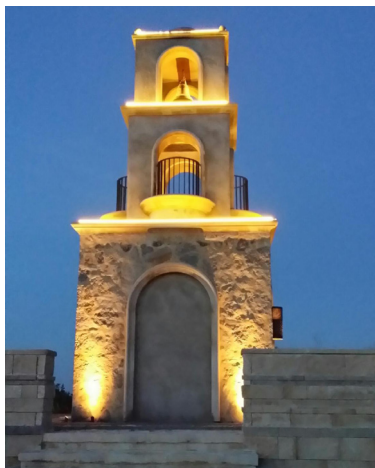

RIO | oslo

NEOGLOW

LED Neon

NG



NEOGLOW NG :

The NeoGlow LED flexible lighting system is a perfect replacement for standard Glass Neon applications. It is highly flexible and easy to install. NeoGlow also is low voltage and IP65 (RGB IP67) rated which makes it a perfect choice for outdoor applications. Shape it around curves, and corners, and create logos, letting, and patterns where traditional glass neon was once used. NeoGlow lets you save 70% over traditional lighting methods at only 2W/foot (4.5W/foot RGB)! It is also lightweight and low voltage which makes it safer and easier to both transport and install.

- 100,000+ hours of operation
- 2 year warranty

SPECIFICATIONS

Housing	Molded silicon sleeve UV and flame resistant
Diffuser	Milky white White PVC Base Edge to increase luminosity
Length / Cutting	50ft per reel / SINGLE COLOR ~2" RGB ~3.2"
LED Type	SINGLE COLOR SMD 3528 RGB SMD 5050
LED Quantity	SINGLE COLOR ~25 LED/ft RGB ~24 LED/ft
Operating Voltage	24VDC
Max Run Length	1 roll (50 feet)

Dimensions	Diagram	A		B	
		Single Color	.33"	.67"	
		RGB	.51"	1.02"	


ACCESSORIES



CK-NG08
Power connector
CK-NG16-RGB
Power connector



EC-NG08
End Cap
EC-NG16-RGB
End Cap



UC-NG08-100
Mounting Track (1m)
UC-NG16-100-RGB
Mounting Track (1m)



IC-NG08
Pin connector
IC-NG16-RGB
Pin connector

Model Number	Cutting Interval	Watts/ft	Color	Total Watts	Cord Termination
NG08W-2D-W	2 inches	2W/ft	Warm White	100W	2-wire
NG08W-2D-C	2 inches	2W/ft	Cool White	100W	2-wire
NG08W-2D-B	2 inches	2W/ft	Blue	100W	2-wire
NG08W-2D-G	2 inches	2W/ft	Green	100W	2-wire
NG08W-2D-LY	2 inches	2W/ft	Yellow	100W	2-wire
NG08W-2D-R	5 inches	1.2W/ft	Red	60W	2-wire
NG08W-2D-A	5 inches	1.2W/ft	Amber	60W	2-wire
NG08W-2D-O	5 inches	1.2W/ft	Orange	60W	2-wire
NG16W-2D-RGB	3 inches	4.5W/ft	RGB	225W	4-wire



illuminfx

illuminfx reserves the right to make changes to specifications at any time with or without notice

neoglow NG 2015 | © 2015 illuminfx
www.illuminfx.com | 585 - 254 - 8010