

in grade



oslo

# ASPEN

2W LED

# SL2



## ASPEN SL2 :


The Aspen SL2 Series of LED In Grade fixtures are perfect for pathway illumination, or turn them on their side to light up small walls or railings. They come in 3 different styles with different outputs which gives you flexibility for almost any job application. Perfect for path lights and step lights. Comes with optional mounting sleeve for easy installation.

- 5-year warranty
- Long life : 50,000 hours

### SPECIFICATIONS

Housing	12" Die-cast powder coated aluminum
Front Cover	316# stainless steel
Operating temp	-20°C~40°C
Loading Capacity	>4400 lbs
Cable Gland	IP68 PG-9 PVC
Waterproof Seal	Molded shaped double silicone seal
LED	10 power type
Driver	Constant Current Output
Cord	6 ft
Cord Termination	<b>OSLO Warm White</b> —Tinned wire ends
Mounting Sleeve	011 PVC

### DIMENSIONS

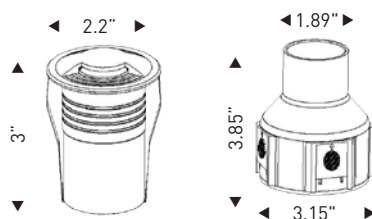

SL2 w/Optional Mounting Sleeve

Model Number	LED Array	Input Voltage	Color	# of Openings	Cord Termination	Max Power	LUM Flux
SL2-L12-1AW1-S-20HW	1 x 2W	12VAC	Warm White 3000K	1	2-wire	2.6W	1.3
SL2-L12-1AW2-S-20HW	1 x 2W	12VAC	Warm White 3000K	2	2-wire	2.6W	1.7
SL2-L12-1AW4-S-20HW	1 x 2W	12VAC	Warm White 3000K	4	2-wire	2.6W	1.7



illuminfx reserves the right to make changes to specifications at any time with or without notice

aspen SL2 2015 | © 2015 illuminfx  
www.illuminfx.com | 585 - 254 - 8010