



in grade

oslo

ASPEN
LED

SL4



ASPEN SL4 :


The Aspen SL4 Series of LED In Grade fixtures are perfect for pathway illumination, or turn them on their side to light up small walls or railings. They come in 3 different styles with different outputs which gives you flexibility for almost any job application. Comes with optional mounting sleeve for easy installation.

- 5-year warranty
- Long life : 50,000 hours

SPECIFICATIONS

Housing	12" Die-cast powder coated aluminum
Front Cover	316# stainless steel
Operating Temp	-20°C~40°C
Loading Capacity	>4400 lbs
Cable Gland	IP68 PG-9 PVC
Waterproof Seal	Molded shaped double silicone seal
LED	10 power type
Driver	Constant Current Output
Cord	20 ft
Cord Termination	OSLO Warm White —Tinned wire ends RIO RGB —Male IP68 Quick-Connect
Mounting Sleeve	127# PVC

DIMENSIONS

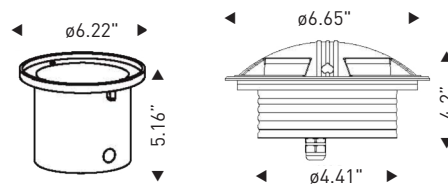

SL4 w/Optional Mounting Sleeve

Model Number	LED Array	Input Voltage	Color	# of Openings	Cord Termination	Max Power	LUM Flux
SL4-L15-1AW1-S-201M	10 x .5W	12VAC	Warm White 3000K	1	2-wire	0.8W	85
SL4-L25-1AW2-S-201M	20 x .5W	12VAC	Warm White 3000K	2	2-wire	1.6W	85
SL4-L25-1AW4-S-201M	24 x .5W	12VAC	Warm White 3000K	4	2-wire	1.7W	85



illuminfx reserves the right to make changes to specifications at any time with or without notice

aspen SL4 2015 | © 2015 illuminfx
www.illuminfx.com | 585 - 254 - 8010