

# CORSICA

## 20/40W LED

# WA2



## CORSICA WA2 :

The CORSICA WA2 LED fixture is illuminFx's high output linear option. The CORSICA's output makes it perfect for building illumination, its streamlined design keeps it hidden, and its mounting bracket makes it easy to install and adjust. Available in light line version with through fixture input/output for easy connections of up to three fixtures\*.

- 5 year warranty
- Long life : 50,000 hours

### SPECIFICATIONS


Housing	Extruded Aluminum, powder coated
Bracket	12# die-cast powder coated aluminum
Glass	Tempered clear glass T=3mm
Lens	3 -in-1 optical lens, efficiency>85%
Cable Gland	IP68 PG-9 PVC
Waterproof Seal	Glass and housing are silicone sealed
Operating Temp	4°F-104°F
Driver	<b>oslo single color</b> —1 circuit <b>RGB 3in1</b> —3 circuits
Cord	20 ft
Cord Termination	<b>oslo warm white</b> —tinned wire ends <b>RIO RGB</b> —Male IP68 Quick-Connect <b>S</b> —Single input into WA1 fixture <b>D</b> —One input and one output for simple daisy chained connections

### DIMENSIONS



x\* connection type  
S — Single connection  
D — Through connection

### MOUNTING

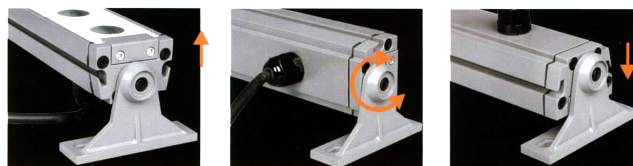

Model Number	LED Array	Input Voltage	Color	Beam Angle	Cord Termination	Max Power	LUM Flux
WA2-L102-1AWA-S-20HW x*	10 x 2W	12VAC	Warm White 3000K	15°	2 wire	25W	1174
WA2-L102-1AWC-S-20HW x*	10 x 2W	12VAC	Warm White 3000K	30°	2 wire	25W	1174
WA2-L102-2DXC-S-201M x*	10 x 2W	24VDC	RGB	30°	Male QC Plug	33.6W	Variable
WA2-L202-1AWA-S-20HW x*	20 x 2W	12VAC	Warm White 3000K	15°	2 wire	50W	2308
WA2-L202-1AWC-S-20HW x*	20 x 2W	12VAC	Warm White 3000K	30°	2 wire	50W	2308
WA2-L202-2DXC-S-201M x*	20 x 2W	24VDC	RGB	30°	Male QC Plug	67.2W	Variable

