



RIO | oslo

**CABO**  
3/7W LED

**FL2**



INTERNAL DMX

# CABO FL2 :


The CABO FL2 Series of LED Underwater Recessed fixtures are perfect for any submersible lighting application. Great for pool or pond illumination as well as fountain and waterfall lighting. Comes with optional PVC mounting sleeve.

- 2-year warranty
- Long life : 30,000 hours | Power Factor : >0.9
- Internal integrated DMX for easy wiring and installation


## SPECIFICATIONS

Housing & Trim Ring	Stainless steel 304
Cable Gland	IP68 imported
Environment	up to 5m depth
Cover Lens	10mm thick tempered glass
Loading Capacity	4410 lbs @ 18 mph
Driver	<b>Single color</b> —1 circuit <b>RGB 3in1</b> —3 circuits
Cord	<b>OSLO Warm White</b> —(1)18/2 @ 6ft <b>RIO RGB</b> —(2)18/2 @ 6ft
Cord Termination	<b>OSLO Warm White</b> —(1)Tinned wire ends <b>RIO RGB</b> —(2)Tinned wire ends
Mounting Sleeve	Rugged, corrosion resistant PP

## PHOTOMETRICS

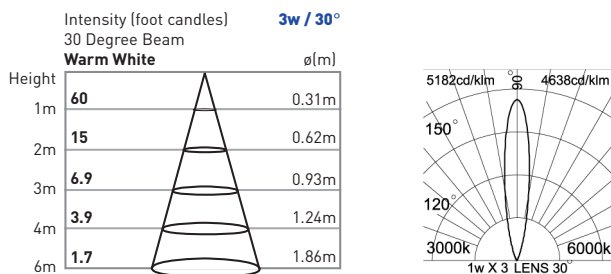

## DIMENSIONS

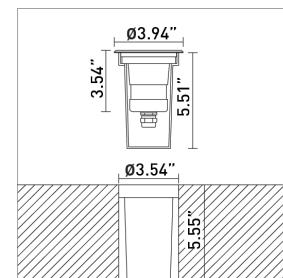

Model Number	LED Array	Input Voltage	Color	Beam Angle*	Cord Termination	Max Power	LUM Flux
FL2-L13-1AWC-S-06HW	1 x 3W	12VAC	Warm White 3000K	30°	2-wire	3W	270
FL2-L13-1ACC-S-06HW	1 x 3W	12VAC	Cool White 6000K	30°	2-wire	3W	330
FL2-L23-2DXC-S-06HW	2 x 3W	24VDC	RGB	30°	(2) 2-wire	9.1W	Variable
FL2-L23-1AWC-S-06HW	2 x 3W	12VAC	Warm White 3000K	30°	2-wire	7W	536
FL2-L23-1ACC-S-06HW	2 x 3W	12VAC	Cool White 6000K	30°	2-wire	7W	630

\*Also available in 15°, and 45°  
Inquire for more information



illuminfx

illuminFx reserves the right to make changes to specifications at any time with or without notice