

in grade



R10 | oslo

# BILLINGS

## 15/40W LED

# IG15



## BILLINGS IG15 :


The BILLINGS IG15 Series of LED In Grade fixtures are the industry's first integrated, adjustable beam luminaire. This allows for tremendous flexibility for lighting applications. The IG15 can be adjusted up to 15° off of center. 3in1 RGB has internal DMX for easy wiring. \*Also available in 100-240VAC, inquire for more information.

- Long life : 50,000 hours
- 5 year warranty

### SPECIFICATIONS


Housing	Die cast aluminum
Trim Ring	Stainless steel
Glass	Step-tempered clear glass
Loading Capacity	4400 pounds
Lens	Optical lens efficiency ≥80%
Cable Gland	IP68 PG-9 copper and nickel coated
Waterproof Seal	Molded shaped double silicone seal
Input Voltage	<b>Single Color</b> —12VAC <b>RGB 3in1</b> —24VDC
Driver	<b>Single color</b> —1 circuit <b>RGB 3in1</b> —3 circuits
Cord	3 ft
Mounting Sleeve	PVC

### PHOTOMETRICS



1.62	95	6	112
1.08	213	4	253
0.82	378	3	452
0.53	851	2	1015
0.27	3405	1	4061

### DIMENSIONS

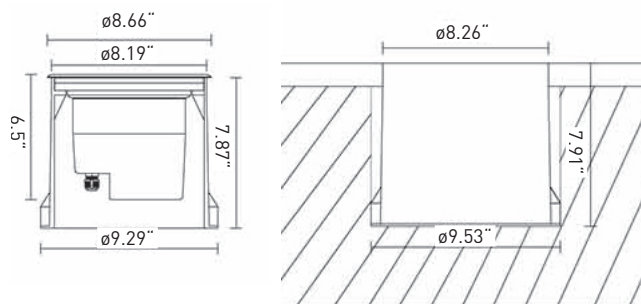

Model Number	LED Array	Input Voltage	Color	Beam Angle	LUM Flux
IG15-L1215-1AWA-S-03HW	12 x 1.5W	12VAC	Warm White 3000K	8°	1080
IG15-L1215-1AWB-S-03HW	12 x 1.5W	12VAC	Warm White 3000K	25°	1080
IG15-L1215-2DXB-S-03HW-DMX	12 x 1.5W	24VDC	RGB	25°	Variable
IG15-L123-2DXB-S-03HW-DMX	12x 3W	24VDC	RGB	25°	Variable



illuminFx reserves the right to make changes to specifications at any time with or without notice