



RIO | oslo

BILLINGS

20W LED

IG20




INTERNAL DMX
SPECIAL ORDER
allow extended lead time

BILLINGS IG20 :

The BILLINGS IG20 is a high efficiency LED ingrade in the IFX line of products. With its advanced COB LED and reflector, this fixture can project efficient light up to 30ft! Available in many static white options as well as full RGBW LEDs for smooth, brilliant color transitions, and interegration with IFX Spectrum Select controls

- 5 year warranty
- Long life : 50,000 hours
- RGBW : Internal DMX operation

DIMENSIONS

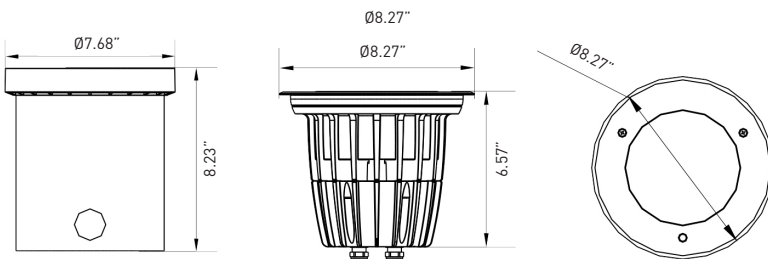

ORDERING GUIDE

example product code: IG20-SP15-Z-S

MODEL	WATTAGE	BEAM SPREAD	COLOR TEMP	FINISH
IG	20	SP15	Z	S
		SP15 - 15°	Z - RGBW	
		SP36 - 36°	22 - 2200K	
		FL46 - 46°	27 - 2700K	
		FL70 - 70°	30 - 3000K	
			35 - 3500K	
			40 - 4000K	
			65 - 6500K	

SPECIFICATIONS

Housing	Cast aluminum, double powder coated
Glass	12mm safety glass, IP68 connector
Hardware	Stainless steel
Luminous Efficacy	96.95 lm/W
CRI	Ra>80
Operating Temp	-22°F - 122°F
Projecting Distance	30ft
Available angles	15° / 36° / 46° / 70°
Input voltage	24VDC

PHOTOMETRICS

IG20-SP15-30-S
Single COB Module
1x500mA DC24V

2700K - 1755 lm
3000K - 1765 lm
4000K - 1854 lm
5600k - 1886 lm

20W 3000K 15°

12363 cd

IG20-SP36-30-S
Single COB Module
1x500mA DC24V

2700K - 1739 lm
3000K - 1804 lm
4000K - 1832 lm
5600k - 1869 lm

20W 3000K 36°

3764 cd

IG20-FL46-30-S
Single COB Module
1x500mA DC24V

2700K - 1431 lm
3000K - 1484 lm
4000K - 1516 lm
5600k - 1538 lm

20W 3000K 46°

2372 cd

