

RF 200 | LED FLOOD LIGHT



Light Output Ratio:	100.0%
Luminaire Power:	197 W
90% Beam Spread	10.1V x 8.8H
50% Beam Lumens	441.5 lumens per klm.

C Range: 0 - 360DEG
C Interval: 15.0DEG
Test Speed: HIGH
Temperature: 23DEG
Operators:
Test Date: 2018-08-02

g Range: 0 - 130DEG
g Interval: 1.0DEG
Test System: EVERFINE GO-2000A_V1 SYSTEM V2.0.402
Humidity: 56%
Test Distance: 10.580m [K=1.0000]
Remarks:

Floodlight Summary:

Report based on lamp delivering 1000 lumens.


Maximum Intensity (Luminaire orientation as tested.)		2296.2 cd per klm. 0.0 degrees vertical 0.0 degrees horizontal
Beam Spread	At 10% of Imax	72.8V x 48.9H
	At 50% of Imax	35.5V x 23.0H
	At 90% of Imax	10.1V x 8.8H
Beam Flux	Total	1000.4 lumens per klm.
	To 10% of Imax	799.1 lumens per klm.
	To 50% of Imax	441.5 lumens per klm.
	To 90% of Imax	82.6 lumens per klm.
	Upward LOR	0.5 %
	Downward LOR	99.5 %
Luminaire Efficiency(Light Output Ratio)		100.0 %

C Range: 0 - 360DEG
C Interval: 15.0DEG
Test Speed: HIGH
Temperature:23DEG
Operators:
Test Date:2018-08-02

g Range: 0 - 130DEG
g Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.402
Humidity:56%
Test Distance:10.580m [K=1.0000]
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:219.62V I:0.9128A P:197.02W PF:0.9829 Freq:49.99Hz Lamp Flux:335.929x24 lm		
NAME: RF200	TYPE:Flood Light	SERIAL No.:20180802001
SUR.:		

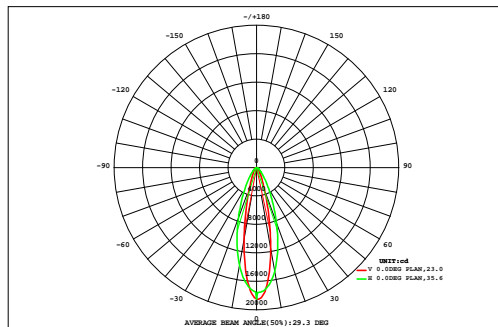

DATA OF LAMP		Eff:40.92lm/W	
MODEL		Imax(cd)	18512
NOMINAL POWER(W)	200	AVAILABILITY(%)	79.3
RATED VOLTAGE(V)	220	Avai. FLUX(lm)	6396
NOMINAL FLUX(lm)	335.929	LOR(%)	100.0
LAMPS INSIDE	24	TOTAL FLUX(lm)	8062
TEST VOLTAGE(V)	219.558	q @50%(H,V)	23,35DEG

VERTICAL(DEG)	AREA FLUX DIAGRAM																UNIT:lm		F t	F a
	0.01	0.02	0.03	0.04	0.05	0.06	0.07	0.08	0.10	0.13	0.15	0.17	0.17	0.16	0.13	0.10	0.06	0.02	1.53	0.00
90	0.01	0.02	0.03	0.04	0.05	0.06	0.07	0.08	0.10	0.13	0.15	0.17	0.17	0.16	0.13	0.10	0.06	0.02	1.53	0.00
80	0.01	0.02	0.03	0.03	0.05	0.10	0.19	0.35	0.56	0.74	0.82	0.79	0.63	0.42	0.26	0.15	0.08	0.02	5.24	0.00
70	0.01	0.02	0.03	0.07	0.23	0.76	1.61	2.56	3.55	4.34	4.54	3.98	2.82	1.67	0.78	0.29	0.10	0.02	27.4	0.00
60	0.01	0.02	0.05	0.31	1.29	2.81	4.75	7.09	10.0	12.7	13.1	10.6	6.80	3.86	1.80	0.59	0.15	0.03	76.0	0.00
50	0.01	0.02	0.14	1.05	2.81	5.29	8.69	13.5	21.4	34.4	39.5	26.4	12.4	6.47	3.08	1.02	0.21	0.03	177	15.7
40	0.01	0.03	0.36	1.89	4.39	8.10	13.3	22.9	44.8	95.6	115	58.7	20.2	9.09	4.29	1.49	0.30	0.03	401	261
30	0.01	0.04	0.66	2.65	6.09	11.0	19.6	39.1	99.1	218	216	86.4	24.8	10.8	5.27	1.94	0.39	0.04	742	617
20	0.01	0.06	0.92	3.37	7.60	14.5	29.5	73.4	215	380	261	79.0	23.8	11.3	5.93	2.31	0.46	0.04	1108	986
10	0.01	0.07	1.09	3.95	9.01	18.9	45.7	148	391	458	212	57.0	21.7	11.6	6.31	2.51	0.51	0.04	1387	1265
0	0.01	0.08	1.12	4.15	9.76	21.9	62.7	226	470	391	132	41.0	19.4	11.1	6.19	2.50	0.52	0.04	1400	1278
-10	0.01	0.07	1.02	3.91	9.58	23.7	81.4	272	405	231	71.5	28.8	16.1	9.95	5.62	2.28	0.48	0.04	1162	1036
-20	0.01	0.05	0.82	3.37	8.96	23.5	85.7	227	239	108	40.5	21.3	13.4	8.59	4.82	1.94	0.41	0.04	787	658
-30	0.01	0.04	0.55	2.57	7.13	18.2	54.0	114	103	49.0	25.4	16.2	11.0	7.08	3.88	1.53	0.32	0.04	415	267
-40	0.01	0.03	0.29	1.62	4.72	10.8	23.3	37.4	36.1	24.6	16.9	12.2	8.59	5.39	2.82	1.09	0.24	0.03	186	11.9
-50	0.01	0.02	0.12	0.74	2.48	5.61	9.91	13.7	14.7	13.2	10.9	8.36	5.79	3.51	1.78	0.66	0.17	0.03	91.8	0.00
-60	0.01	0.01	0.05	0.21	0.80	2.06	3.80	5.45	6.24	6.17	5.44	4.22	2.91	1.77	0.88	0.35	0.12	0.03	40.5	0.00
-70	0.01	0.01	0.02	0.07	0.16	0.37	0.74	1.21	1.56	1.67	1.54	1.26	0.92	0.60	0.35	0.18	0.09	0.02	10.8	0.00
-80	0.01	0.01	0.02	0.03	0.05	0.09	0.13	0.19	0.24	0.28	0.30	0.29	0.26	0.22	0.16	0.11	0.06	0.02	2.48	0.00
-90	0.01	0.01	0.02	0.03	0.05	0.09	0.13	0.19	0.24	0.28	0.30	0.29	0.26	0.22	0.16	0.11	0.06	0.02	2.48	0.00
	-90	-80	-70	-60	-50	-40	-30	-20	HORIZONTAL(DEG)	20	30	40	50	60	70	80	90			
F t	0.11	0.61	7.32	30.0	75.2	168	445	1204	2062	2028	1168	457	192	104	54.4	21.0	4.66	0.56	8021	---
F a	0.00	0.00	0.00	0.00	0.00	0.00	251	1062	1933	1895	1013	241	0.00	0.00	0.00	0.00	0.00	0.00	---	6396


one-half-peak spread: U:16.6,D:16.2 , L:11.2,NEMA. Beam Type: Type 4 x 5 (H x V)

C Range: 0 - 360DEG
 C Interval: 15.0DEG
 Test Speed: HIGH
 Temperature:23DEG
 Operators:
 Test Date:2018-08-02

g Range: 0 - 130DEG
 g Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.402
 Humidity:56%
 Test Distance:10.580m [K=1.0000]
 Remarks:

ISOCANDELA DIAGRAM

Test:U:219.62V I:0.9128A P:197.02W PF:0.9829 Freq:49.99Hz Lamp Flux:335.929x24 lm		
NAME: RF200	TYPE:Flood Light	SERIAL No.:20180802001
	SUR.:	

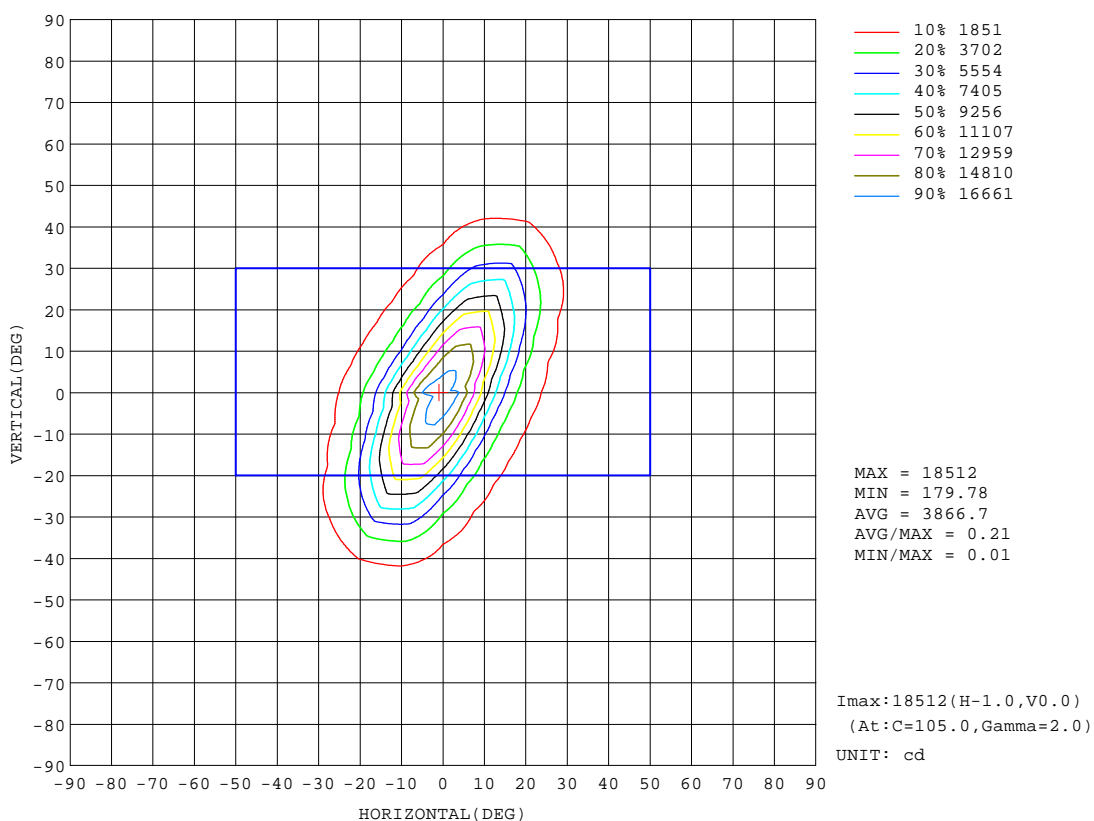


C Range: 0 - 360DEG
C Interval: 15.0DEG
Test Speed: HIGH
Temperature:23DEG
Operators:
Test Date:2018-08-02

g Range: 0 - 130DEG
g Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.402
Humidity:56%
Test Distance:10.580m [K=1.0000]
Remarks:


ISOLUX DIAGRAM

Test:U:219.62V I:0.9128A P:197.02W PF:0.9829 Freq:49.99Hz Lamp Flux:335.929x24 lm		
NAME: RF200	TYPE:Flood Light	SERIAL No.:20180802001
	SUR.:	

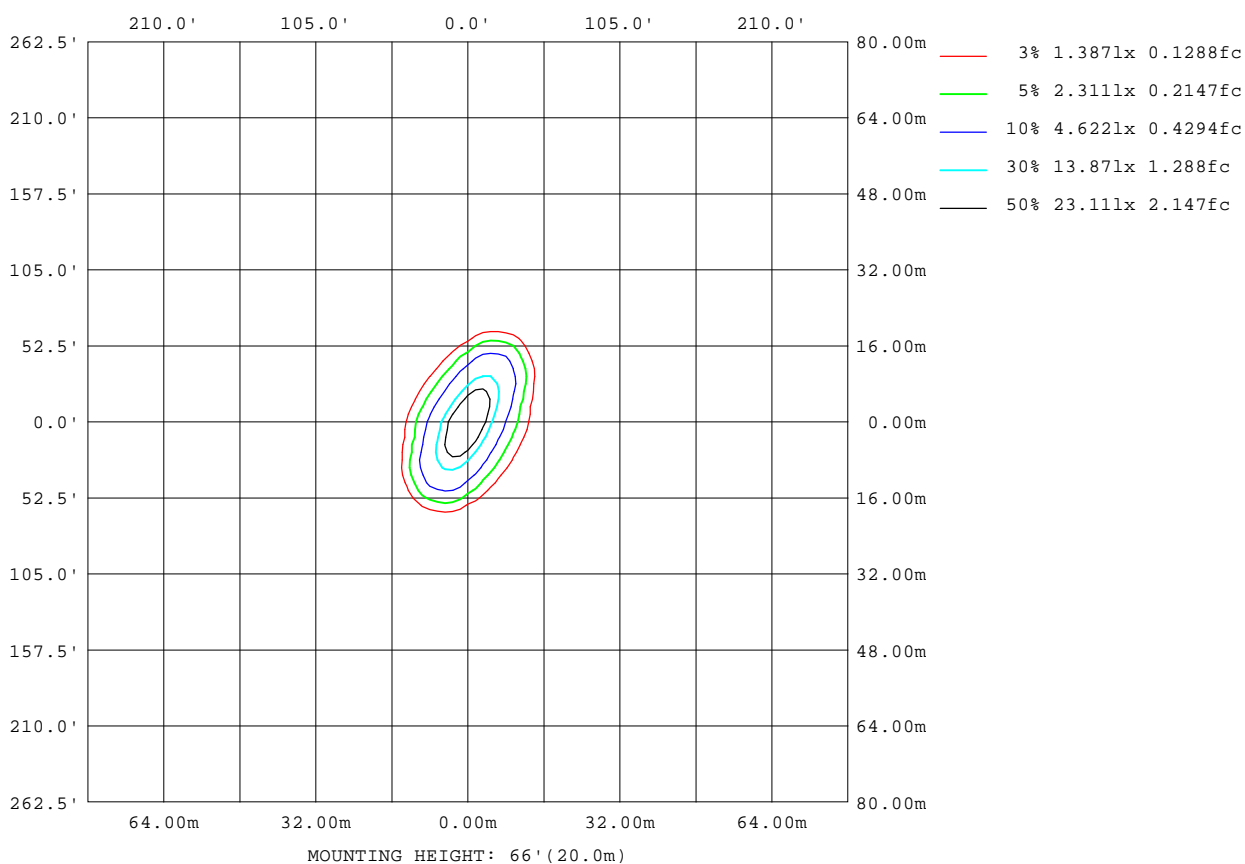

C Range: 0 - 360DEG
C Interval: 15.0DEG
Test Speed: HIGH
Temperature:23DEG
Operators:
Test Date:2018-08-02

g Range: 0 - 130DEG
g Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.402
Humidity:56%
Test Distance:10.580m [K=1.0000]
Remarks:

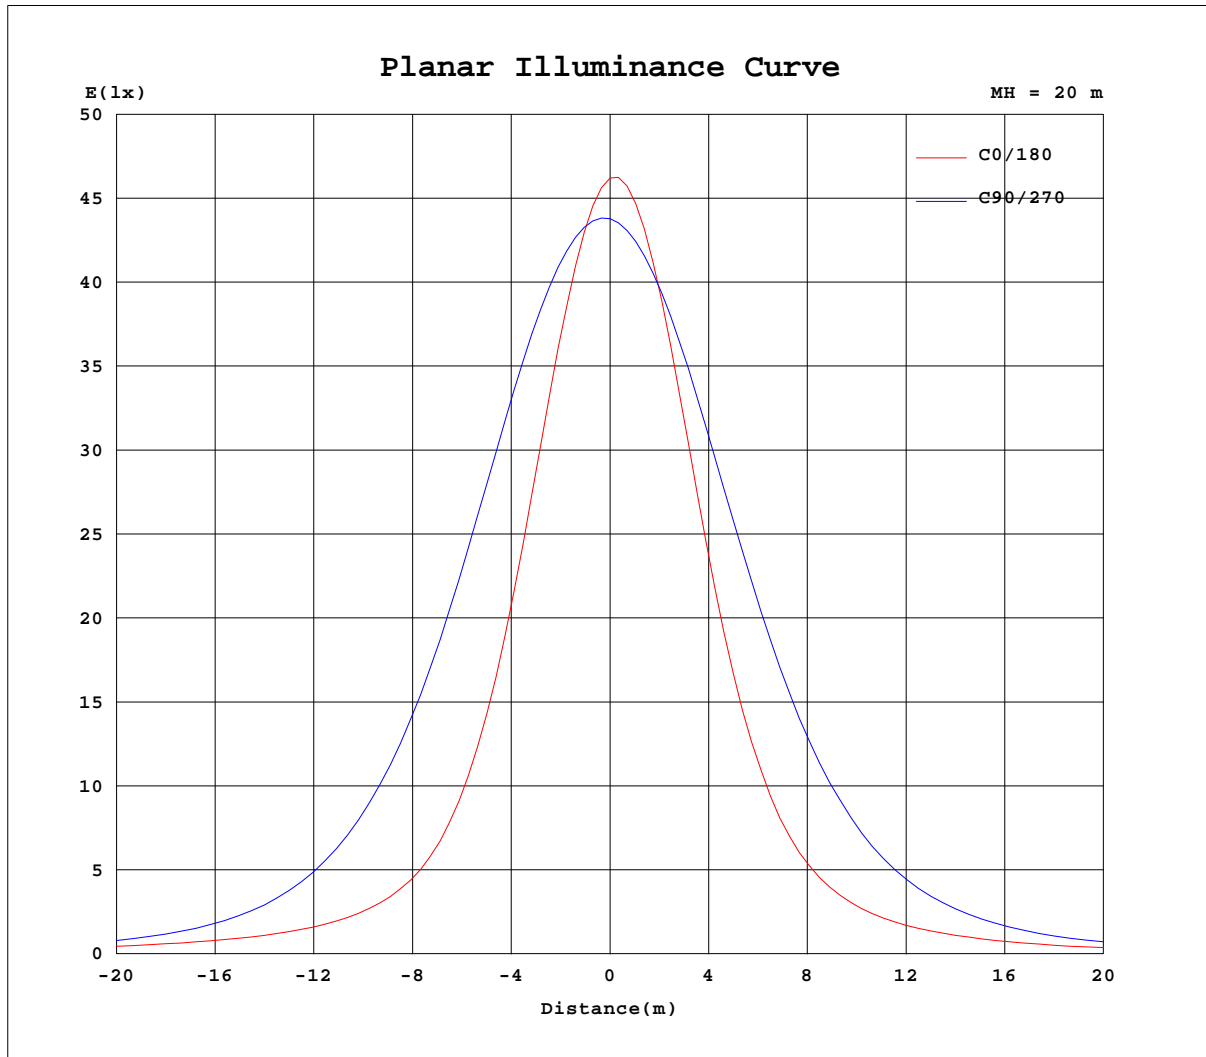
Planar Illuminance Curve


C Range: 0 - 360DEG
C Interval: 15.0DEG
Test Speed: HIGH
Temperature: 23DEG
Operators:
Test Date: 2018-08-02

g Range: 0 - 130DEG
g Interval: 1.0DEG
Test System: EVERFINE GO-2000A_V1 SYSTEM V2.0.402
Humidity: 56%
Test Distance: 10.580m [K=1.0000]
Remarks:

AAI Figure

Test:U:219.62V I:0.9128A P:197.02W PF:0.9829 Freq:49.99Hz Lamp Flux:335.929x24 lm		
NAME: RF200	TYPE:Flood Light	SERIAL No.:20180802001
	SUR.:	

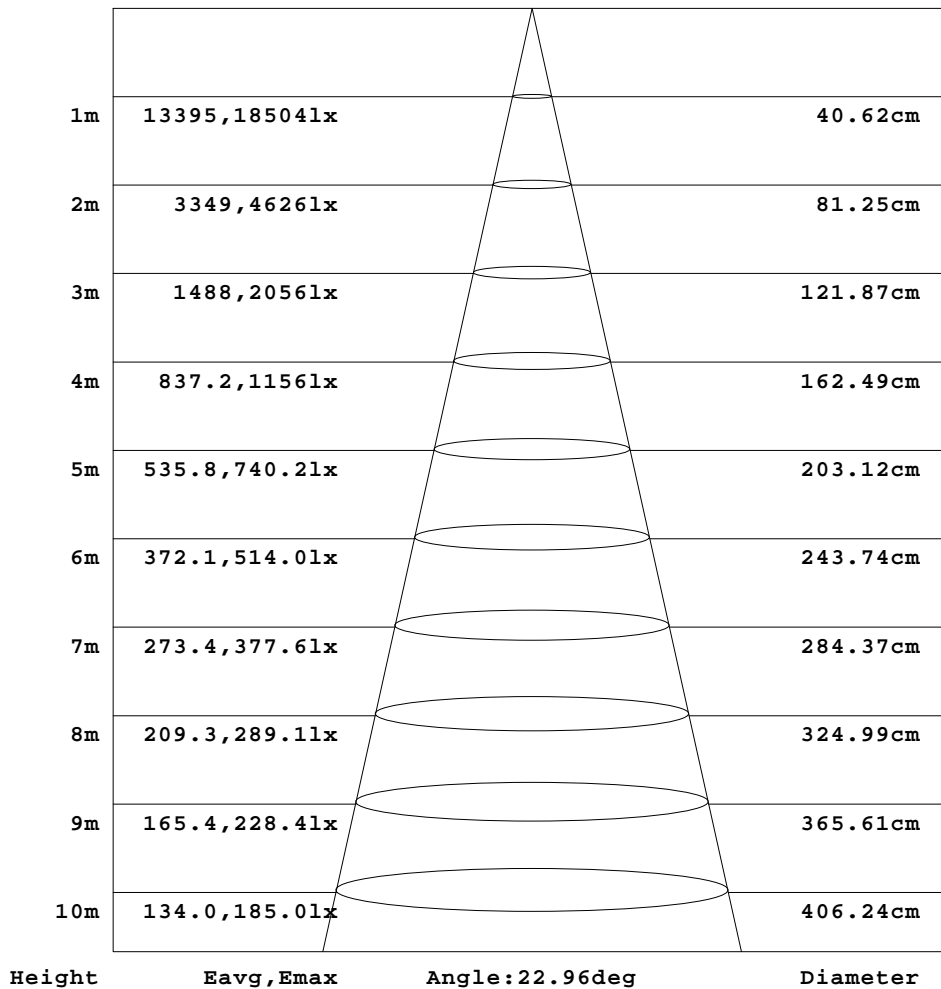Flux out:1901 lm


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
 C Interval: 15.0DEG
 Test Speed: HIGH
 Temperature:23DEG
 Operators:
 Test Date:2018-08-02

g Range: 0 - 130DEG
 g Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.402
 Humidity:56%
 Test Distance:10.580m [K=1.0000]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:219.62V I:0.9128A P:197.02W PF:0.9829 Freq:49.99Hz Lamp Flux:335.929x24 lm		
NAME: RF200	TYPE:Flood Light	SERIAL No.:20180802001
SUR.:		

Table--1
UNIT: x10cd

H(DEG) V(DEG)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-180	0.29	0.35	0.43	0.55	0.74	1.05	1.55	2.30	3.28	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-170	0.29	0.34	0.41	0.51	0.68	0.94	1.34	1.91	2.60	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-160	0.29	0.33	0.39	0.47	0.60	0.79	1.07	1.43	1.91	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-150	0.29	0.32	0.36	0.42	0.51	0.63	0.84	1.20	1.66	2.21	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-140	0.29	0.31	0.33	0.37	0.42	0.53	0.73	1.00	1.35	1.75	2.20	2.67	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-130	0.29	0.30	0.31	0.32	0.35	0.45	0.59	0.78	1.01	1.27	1.57	1.86	2.14	2.41	2.60	2.73	2.80	2.75	2.65
-120	0.29	0.28	0.28	0.28	0.31	0.37	0.46	0.57	0.70	0.86	1.02	1.17	1.33	1.45	1.53	1.59	1.58	1.53	1.45
-110	0.29	0.27	0.26	0.24	0.26	0.30	0.34	0.40	0.46	0.54	0.61	0.68	0.74	0.78	0.81	0.82	0.80	0.75	0.70
-100	0.29	0.26	0.24	0.21	0.22	0.24	0.25	0.27	0.30	0.32	0.34	0.36	0.38	0.38	0.38	0.38	0.36	0.34	0.32
-90	0.29	0.25	0.22	0.18	0.19	0.19	0.19	0.20	0.20	0.20	0.20	0.20	0.20	0.23	0.25	0.28	0.32	0.37	0.42
-80	0.29	0.24	0.20	0.17	0.16	0.15	0.15	0.21	0.29	0.38	0.49	0.60	0.72	0.86	0.99	1.12	1.27	1.41	1.54
-70	0.29	0.24	0.19	0.15	0.16	0.25	0.39	0.59	0.87	1.34	2.21	3.36	4.76	6.35	7.98	9.52	10.5	11.0	11.3
-60	0.29	0.23	0.18	0.16	0.28	0.52	0.94	2.03	4.02	6.86	10.2	14.0	18.5	23.2	26.9	30.3	31.9	32.1	31.6
-50	0.29	0.23	0.18	0.24	0.49	1.10	3.03	6.22	10.6	16.1	23.1	31.2	40.7	52.1	62.2	70.9	75.3	71.9	65.2
-40	0.29	0.23	0.19	0.35	0.76	2.69	6.52	11.6	17.9	26.7	38.8	55.3	81.1	125	191	218	231	195	137
-30	0.29	0.22	0.20	0.46	1.40	4.74	9.98	16.5	25.6	37.2	53.3	82.6	141	251	434	624	644	548	342
-20	0.29	0.23	0.22	0.55	2.13	6.74	12.7	20.6	29.7	42.5	61.2	91.0	148	308	577	909	1162	1134	822
-10	0.29	0.23	0.23	0.59	2.62	7.92	14.5	22.9	32.5	44.4	60.9	85.5	133	242	468	861	1347	1602	1479
0	0.29	0.23	0.24	0.59	2.62	8.14	14.7	23.1	32.6	43.3	58.7	81.7	118	188	337	646	1154	1667	1849
10	0.29	0.23	0.23	0.55	2.27	7.42	13.6	20.6	29.4	38.2	49.1	64.4	87.5	126	196	325	567	975	1391
20	0.29	0.23	0.21	0.47	1.49	5.71	11.1	16.9	23.6	31.8	39.8	49.9	63.6	84.4	114	170	269	448	748
30	0.29	0.24	0.20	0.37	0.76	3.35	8.07	12.8	18.0	24.0	30.9	37.8	46.0	57.4	74.2	96.7	135	208	310
40	0.29	0.24	0.20	0.26	0.50	1.18	4.23	8.43	12.1	16.5	21.1	26.8	32.5	38.9	46.6	59.2	72.7	99.4	126
50	0.29	0.25	0.21	0.19	0.30	0.52	1.03	3.36	6.41	9.43	12.6	15.8	19.8	24.1	28.8	33.7	39.9	48.5	56.3
60	0.29	0.26	0.23	0.20	0.18	0.27	0.41	0.59	1.07	2.59	4.38	6.71	8.80	11.0	13.0	15.0	17.5	20.1	22.2
70	0.29	0.26	0.24	0.22	0.20	0.19	0.18	0.22	0.31	0.41	0.55	0.74	1.10	1.76	2.52	3.28	4.14	4.95	5.65
80	0.29	0.27	0.26	0.25	0.24	0.23	0.22	0.21	0.21	0.20	0.19	0.19	0.21	0.26	0.32	0.37	0.46	0.54	0.62
90	0.29	0.28	0.28	0.27	0.27	0.27	0.27	0.27	0.28	0.28	0.28	0.28	0.29	0.29	0.30	0.31	0.32	0.33	0.34
100	0.29	0.29	0.30	0.30	0.31	0.32	0.33	0.34	0.35	0.36	0.38	0.40	0.42	0.46	0.50	0.53	0.58	0.63	0.67
110	0.29	0.30	0.32	0.33	0.35	0.37	0.39	0.42	0.45	0.49	0.54	0.60	0.67	0.78	0.90	1.02	1.14	1.25	1.35
120	0.29	0.31	0.34	0.36	0.39	0.43	0.48	0.53	0.61	0.70	0.81	0.98	1.18	1.42	1.68	1.94	2.14	2.29	2.41
130	0.29	0.32	0.35	0.39	0.44	0.51	0.59	0.69	0.83	1.03	1.28	1.63	2.08	2.54	2.95	3.28	3.53	3.67	3.76
140	0.29	0.33	0.37	0.43	0.50	0.60	0.74	0.92	1.16	1.53	2.05	2.69	0.00	0.00	0.00	0.00	0.00	0.00	0.00
150	0.29	0.33	0.39	0.47	0.57	0.71	0.91	1.22	1.66	2.28	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
160	0.29	0.34	0.41	0.50	0.64	0.84	1.14	1.58	2.24	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
170	0.29	0.35	0.42	0.53	0.70	0.97	1.38	2.01	2.88	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
180	0.29	0.35	0.43	0.55	0.74	1.05	1.55	2.30	3.28	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

C Range: 0 - 360DEG
C Interval: 15.0DEG
Test Speed: HIGH
Temperature:23DEG
Operators:
Test Date:2018-08-02

g Range: 0 - 130DEG
g Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.402
Humidity:56%
Test Distance:10.580m [K=1.0000]
Remarks:



LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:219.62V I:0.9128A P:197.02W PF:0.9829 Freq:49.99Hz Lamp Flux:335.929x24 lm		
NAME: RF200	TYPE:Flood Light	SERIAL No.:20180802001
SUR.:		

Table--2

UNIT: x10cd

H(DEG) V(DEG)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90
-180	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	2.23	1.46	0.93	0.61	0.42	0.31	0.23	0.32	0.69
-170	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	1.86	1.22	0.81	0.56	0.40	0.30	0.23	0.33	0.69
-160	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	1.33	0.91	0.65	0.48	0.36	0.28	0.22	0.34	0.69
-150	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	1.27	0.91	0.67	0.51	0.40	0.32	0.26	0.21	0.37	0.69
-140	0.00	0.00	0.00	0.00	0.00	0.00	1.45	1.07	0.79	0.61	0.50	0.41	0.34	0.28	0.24	0.22	0.40	0.69
-130	2.48	2.26	1.97	1.64	1.32	1.04	0.80	0.63	0.52	0.43	0.37	0.32	0.28	0.24	0.21	0.26	0.44	0.69
-120	1.32	1.16	0.99	0.83	0.67	0.56	0.47	0.40	0.35	0.31	0.28	0.25	0.23	0.21	0.23	0.33	0.50	0.69
-110	0.63	0.55	0.48	0.42	0.37	0.32	0.29	0.27	0.25	0.23	0.21	0.20	0.20	0.20	0.25	0.33	0.43	0.56
-100	0.29	0.27	0.25	0.23	0.22	0.20	0.20	0.20	0.23	0.26	0.29	0.33	0.38	0.43	0.50	0.56	0.63	0.69
-90	0.46	0.50	0.54	0.56	0.58	0.61	0.62	0.64	0.66	0.66	0.67	0.68	0.68	0.69	0.69	0.69	0.69	0.69
-80	1.69	1.83	1.92	1.90	1.86	1.81	1.70	1.60	1.49	1.38	1.28	1.18	1.09	1.01	0.92	0.83	0.75	0.69
-70	11.3	11.1	10.4	9.54	8.66	7.81	6.80	5.69	4.69	3.86	3.07	2.39	1.81	1.47	1.24	1.02	0.82	0.69
-60	30.6	29.0	27.1	25.1	22.8	20.0	17.1	14.5	12.0	9.60	7.17	5.22	3.59	2.42	1.63	1.23	0.91	0.69
-50	59.1	52.4	46.9	42.0	37.4	33.3	29.0	24.8	20.6	16.5	12.9	9.62	6.34	3.93	2.30	1.44	0.99	0.69
-40	110	82.6	69.3	57.6	50.8	44.9	39.4	34.3	29.1	23.9	19.0	14.3	9.92	5.85	3.15	1.68	1.07	0.69
-30	226	144	103	80.9	66.2	56.4	48.7	41.8	36.4	30.9	24.9	18.7	13.2	8.00	4.04	1.96	1.14	0.69
-20	490	276	169	115	86.9	68.8	58.2	50.1	42.9	36.4	29.8	22.9	16.0	9.85	4.84	2.22	1.19	0.69
-10	1030	572	299	176	119	87.3	69.4	57.8	48.8	41.2	33.9	26.1	18.1	11.1	5.41	2.39	1.22	0.69
0	1563	1022	549	280	163	110	81.4	64.5	53.1	44.3	36.3	27.9	19.2	11.5	5.60	2.44	1.23	0.69
10	1540	1307	836	447	229	127	84.9	65.1	52.5	43.4	35.1	26.8	18.3	10.9	5.30	2.35	1.21	0.69
20	1040	1091	863	558	303	148	93.3	66.7	51.0	40.2	32.0	23.9	16.0	9.50	4.64	2.14	1.17	0.69
30	496	596	610	442	264	151	90.2	60.9	46.5	35.7	27.3	19.5	12.8	7.46	3.78	1.87	1.12	0.69
40	187	229	233	214	142	90.9	62.2	46.4	35.6	27.5	21.0	14.6	9.26	5.27	2.84	1.59	1.04	0.69
50	65.9	72.0	71.9	66.5	57.5	45.4	36.6	29.7	23.8	18.6	13.6	9.31	5.73	3.41	2.02	1.36	0.96	0.69
60	24.7	26.4	27.0	26.0	24.3	21.3	18.0	15.0	12.1	9.39	6.92	4.65	3.04	2.00	1.45	1.15	0.88	0.69
70	6.36	6.84	7.05	7.10	6.85	6.31	5.55	4.84	3.95	3.04	2.34	1.84	1.48	1.28	1.11	0.95	0.80	0.69
80	0.70	0.77	0.84	0.90	0.95	0.99	1.02	1.03	1.04	1.03	1.02	0.99	0.94	0.88	0.82	0.78	0.73	0.69
90	0.35	0.36	0.37	0.37	0.38	0.38	0.42	0.46	0.49	0.53	0.56	0.59	0.61	0.63	0.64	0.66	0.67	0.69
100	0.70	0.72	0.74	0.72	0.70	0.67	0.61	0.56	0.51	0.45	0.39	0.34	0.37	0.41	0.47	0.54	0.61	0.69
110	1.38	1.41	1.41	1.36	1.30	1.22	1.10	0.98	0.84	0.71	0.58	0.48	0.39	0.33	0.34	0.42	0.55	0.69
120	2.43	2.43	2.38	2.28	2.16	1.99	1.79	1.58	1.33	1.08	0.86	0.66	0.50	0.39	0.30	0.34	0.49	0.69
130	3.74	3.67	3.55	3.39	3.18	2.91	2.62	2.28	1.91	1.55	1.19	0.87	0.63	0.45	0.33	0.28	0.44	0.69
140	0.00	0.00	0.00	0.00	0.00	0.00	3.50	3.04	2.56	2.05	1.54	1.10	0.75	0.51	0.35	0.26	0.40	0.69
150	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	3.17	2.51	1.87	1.31	0.85	0.54	0.36	0.26	0.37	0.69
160	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	2.89	2.07	1.35	0.85	0.54	0.36	0.25	0.34	0.69
170	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	2.72	1.87	1.21	0.77	0.50	0.34	0.25	0.33	0.69
180	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	2.23	1.46	0.93	0.61	0.42	0.31	0.23	0.32	0.69

C Range: 0 - 360DEG
 C Interval: 15.0DEG
 Test Speed: HIGH
 Temperature:23DEG
 Operators:
 Test Date:2018-08-02

g Range: 0 - 130DEG
 g Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.402
 Humidity:56%
 Test Distance:10.580m [K=1.0000]
 Remarks: