



Catalog Number _____
 Type _____
 Job _____

The PULSAR 60 watt landscape stake fixture is a high powered LED solution for almost any outdoor landscape lighting project. This high efficiency LED fixture comes in full color changing RGBW with a standard configuration including internal DMX for integration with IFX Spectrum Select controls.

PULSAR RF60

60W

SPECIFICATIONS



Model#	RF60
Wattage	60W
Lumens	2119 lm
Color Temp	RGBW 4in1
Power Factor	>0.95
CRI	>80
Input Voltage	36VDC / 100~264VAC
Housing	Die-cast Aluminum
Glass	8mm clear safety glass
Finish	Corrosion resistant Akzonobel
Operating Temp	-13°F~122°F
Warranty	5 years

Features


- **Housing color** : RAL9023 Pearl Dark Gray
- **Graduated Disc** : Max vertical aiming of -60° to +80°
- **LED Module** : High-power LED on metal-core PCB
- **Light Distribution** : Optical PMMA secondary light distribution




DIMENSIONS

RF60


Surface Mount

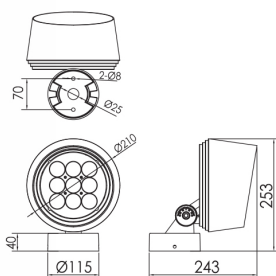



Pole Mount

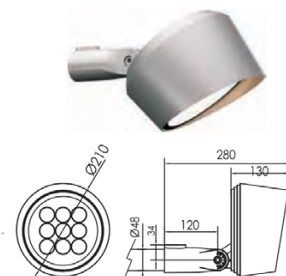

Stake Mount

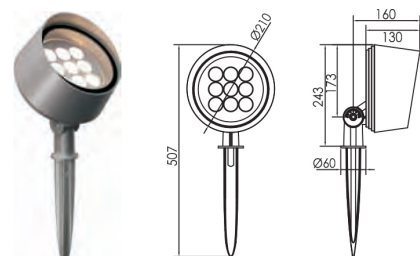

PHOTOMETRICS

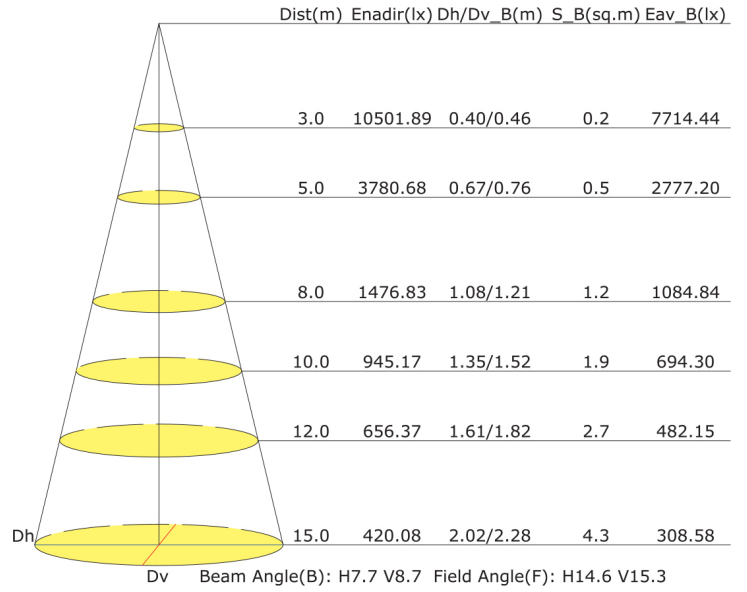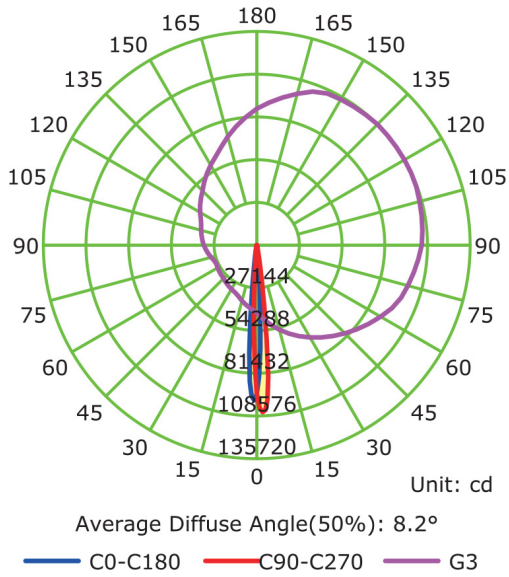

ORDERING GUIDE

EX : RF60/SP15/3Z/DGSM

Series	Wattage	Beam Spread	Voltage	CCT	Finish	Mouting
<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>
RF Pulsar Flood	20 20W	SP15 15° SP20 20° SP30 30° ASY 15°x60°	U 100-264VAC 3 36VDC	Z 4in1 RGBW	DG Dark Gray	PM Pole Mount ST Stake Mount SM Surface Mount