



commercial

oslo

BOLLARD LED Path Light

BD1



BOLLARD BD1 :

The IlluminFx BD1 Bollard is an energy efficient LED path light. This low wattage, high lumen solution is perfect for commercial locations to light up pathways. Comes standard with a mounting kit with 8" bolts.

- CSA: Listed for wet locations
- 50,000 Hours+

SPECIFICATIONS

Housing	Extruded aluminum housing				
Refractor	IES Type III clear prismatic Borosilicate glass				
Lens	Clear polycarbonate				
LED	LG Innotek				
Wattage	9 / 12W				
Lumens		C		F	
		12W	9W	12W	9W
	6500K	1288	850	1345	888
	5700K	1288	850	1345	888
	4000K	1076	710	1100	726
CRI	>Ra70				
Color Temp	4000 / 5700 / 6500K				
Driver	Electronic Driver, 120-277VAC, 50/60Hz				
Dimmable	YES				
Operating Temp	-40–122°F				
Finish	Bronze / White / Black				

OPTIONAL MOUNTING KITS



- BDAN4**—Includes Bracket w/Three (3) 4" Anchor Bolts
- BDAN8**—Includes Bracket w/Three (3) 8" Anchor Bolts
- BDAN12**—Includes Bracket w/Three (3) 12" Anchor Bolts
- BDAN15**—Includes Bracket w/Three (3) 15" Anchor Bolts




BDRM—Root Mount Kit

ORDERING GUIDE

example product code: BD1/09/U40/135/BZ

SERIES	W1	VOLTAGE	COLOR TEMP	BEAM SPREAD	HOUSING FINISH
BD1	09	U	40	135	BZ
	09—9W		65—6500K (TW)	24—24°	DZ—Bronze
	12—12W		57—5700K (NW)	45—45°	W—White
			40—4000K (NW)	60—60°	B—Black
				130—130°	
				135—135° x 50°	

DIMENSIONS

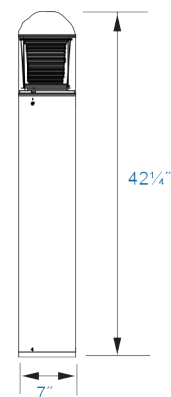

illuminfx

illuminFx reserves the right to make changes to specifications at any time with or without notice