



large flood

RIO | oslo

PULSAR

580W LED

LF580



INTERNAL DMX
SPECIAL ORDER
allow extended lead time

PULSAR LF580 :


The PULSAR LF580 is the largest LED flood light in the IFX line of products. With its advanced LEDs and lenses, this fixture can project efficient light up to 360ft! Available in many static white options as well as full RGBW LEDs for smooth, brilliant color transitions, and interegration with IFX Spectrum Select controls

- 5 year warranty
- Long life : 50,000 hours
- RGBW : Internal DMX operation

SPECIFICATIONS

Housing	Extruded aluminum, powder coated
Glass	4mm safety glass, IP68 connector
Hardware	Stainless steel
Luminous Efficacy	38.35 lm/W
CRI	Ra>80
Operating Temp	-22°F-122°F
Projecting Distance	360ft
Adjustable angle	180°
Input voltage	Universal 100-220VAC


DIMENSIONS

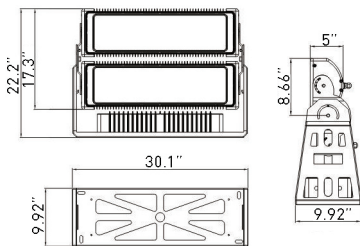

PHOTOMETRICS


LF580-SP08-Z-DG

LED Unit/Color 72x2.4A 580W
AC220V 8°
红色 630nm-5251 lm
绿色 528nm-6782 lm
蓝色 470nm-1531 lm
白色 6500K-8314 lm
RGBW ●●●○

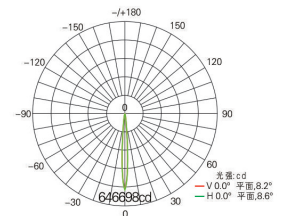


LF580-SP15-Z-DG

LED Unit/Color 72x2.4A 580W
AC220V 15°
红色 630nm-5338 lm
绿色 528nm-6895 lm
蓝色 470nm-1557 lm
白色 6500K-8452 lm
RGBW ●●●○

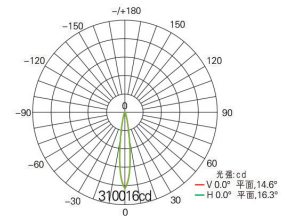

LF580-SP25-Z-DG

LED Unit/Color 72x2.4A 580W
AC220V 25°
红色 630nm-5174 lm
绿色 528nm-6683 lm
蓝色 470nm-1509 lm
白色 6500K-8192 lm
RGBW ●●●○

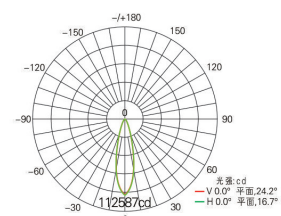

ORDERING GUIDE

example product code: LF580-SP08-Z-DG

MODEL	WATTAGE	BEAM SPREAD	COLOR TEMP	FINISH
LF	580	SP08	Z	DG
		SP08 - 8°	Z - RGBW	
		SP15 - 15°	22 - 2200K	
		SP25 - 25°	27 - 2700K	
			30 - 3000K	
			35 - 3500K	
			40 - 4000K	
			65 - 6500K	



illuminfx

illuminfx reserves the right to make changes to specifications at any time with or without notice