



Commercial

**WP06**

40/90/125W LED

WP




## WP06 :

illuminFx's new WP06 line of LED wallpacks utilizes cutting edge technology to create an amazing fixture for both retrofit and new installations. A precision die cast powder coated aluminum housing ensures for a long life. And the UL/cUL listed LED driver is protected from short circuit, over current/voltage, and temperature. These power supplies power the CREE XBD chip with last 100,000 hours. Finally the built in photocell makes the whole system easy to install.

### SPECIFICATIONS

Housing	Powder coated Die-cast aluminum
Coating	UV stabilized powder coated
Color Temp	3000 / 4100 / 5500 / 6000 K
Beam Spread	120°
Glass	Heat and impact resistant tempered
MH Equivalent	<b>40W</b> 150W MH
	<b>90W</b> 320W MH
	<b>125W</b> 400W MH
LED	CREE XBD / PF 0.98
Environment	Suitable for wet locations. 0-99% humidity
Input Voltage	100-277VAC
Certifications	UL/CUL listed for wet locations DLC listed (4100K and 5500K ONLY)
Warranty	5 years

### PHOTOMETRICS

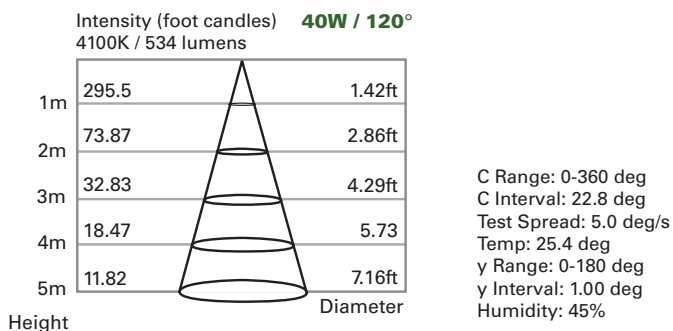

### DIMENSIONS

Fixture Wattage	Dimensions (A, B, C)		
	A	B	C
40W	7.5"	9.46"	13.1"
90W	9.3"	9.4"	16.9"
125W	12.7"	9.5"	16.9"

### ORDERING GUIDE

MODEL NUMBER	WATTAGE	BEAM SPREAD	INPUT VOLTAGE	CRI	COLOR TEMP	HOUSING COLOR
WP06	40	FL120	UA	7	55	BL

40W  
90W  
125W

30 - 3000K  
41 - 4000K  
**55 - 5500K**  
60 - 6000K