



RIO

SLIMFLEX

RGBW LED Tape Light

SFT

SPECIFICATIONS

Housing	IP67—Molded silicon sleeve
Voltage	RGBW—24V DC
Length	5m [16.7'] per reel
Cuttable	RGBW—Every ~6.5"
Power	RGBW—72W [14.4W/m]
Max Connection	10m [33.4'] [2 reels] (UL: ~23')
Current	24v—600mA/m
Humidity	90% RH
Ambient Temp	-40°F ~ 140°F
CRI	>Ra80 (warm white only)
Min. Buckling Radius	>50mm

ACCESSORIES (per reel/IP67 only)

End Cap	5	
Mounting Clip	15	

RoHS Compliant

CE

UL LISTED

IP20


IP67
OUTDOOR RATED

SLIMFLEX SFT :

The SlimFlex SF series high brightness product is a simple to use LED light strip. Anywhere that tape can go, so can the illuminFx LED SlimFlex line. Use under banisters, around stairs, under counters, as cove lighting, or as general accent lighting for almost any application. To make it as easy to use in all situations, SlimFlex is CUTTABLE. This new RGBW strip will also give you access to a high quality warm white as well as the huge array of colors from the RGB color portion of the strip.

- Long life Epistar LED
- 2 year warranty

DIMENSIONS

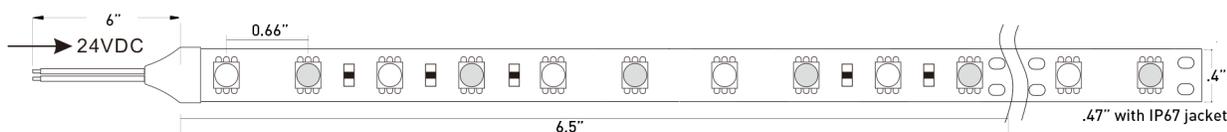

Model Number	Current	Watts/m	Color	Total Watts	Cord Termination	LUM Flux/m	IP Rating
SFT50-60-2-RGBW-20	6 amps/m	14.4W/m	RGBW 	72W	5-wire	630LM	20
SFT50-60-2-RGBW-67	6 amps/m	14.4W/m	RGBW 	72W	5-wire	630LM	67