

PRODUCT  
CATALOG  
v3.0



**OMEGAPRO**

LANDSCAPE LIGHTING

# BULLET & ACCENT

12V  
AC

SOLID  
BRASS

IP  
54

LAMP  
OB-1 MR16  
OB-4 MR11

## OB-1




### SPECIFICATIONS

Body Material	Solid Brass
Max Wattage	50W
Lead Wire	3' 18/2 UL
Spike	PVC
Lens	Convex / Tempered Glass

## OB-4

Body Material	Solid Brass
Max Wattage	35W
Lead Wire	3' 18/2 UL
Spike	PVC
Lens	Tempered Glass

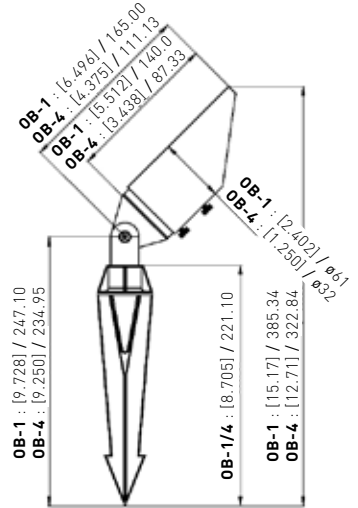

[inches] / millimeters

12V  
AC

SOLID  
BRASS

IP  
54

LAMP  
OB-2 G4  
OB-3 MR16

## OB-2




### SPECIFICATIONS

Body Material	Solid Brass
Max Wattage	35W
Lead Wire	3' 18/2 UL
Spike	PVC
Lens	Frosted, Clear

## OB-3



Body Material	Solid Brass
Max Wattage	35W
Lead Wire	3' 18/2 UL
Spike	PVC
Lens	Frosted, Clear

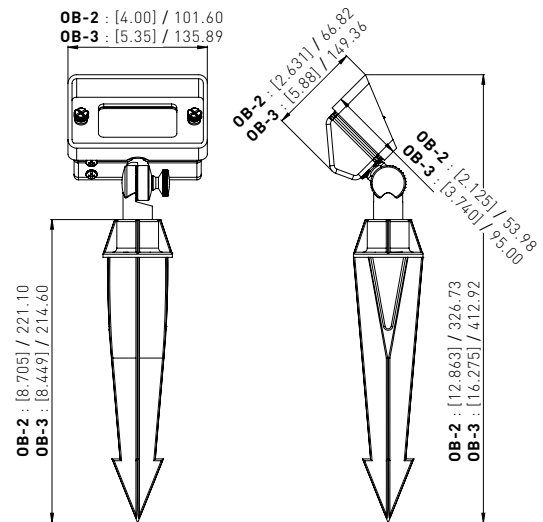

[inches] / millimeters

# DOWN LIGHT

12V  
AC

SOLID  
BRASS

IP  
54


LAMP  
MR16

## DL-1



### SPECIFICATIONS

Body Material	Solid Brass
Max Wattage	50W
Lead Wire	3' 18/2 UL
Bracket	Solid Brass

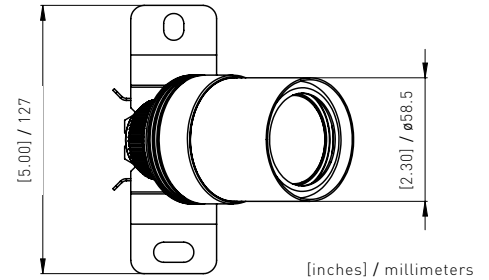

# ACCESSORIES

## BRS-1

8.5" solid brass  
ground stake  
USE WITH OB, DL, AL series



## BRS-2

ø2.75" solid brass  
surface mount  
USE WITH OB, DL, AL series



## SHR-L

7.25" solid brass  
extended shroud  
USE WITH OB-1 and DL-1



Ask today about our selection of low voltage landscape wire and connectors.

Inquire for more information.

# HARDSCAPE

12V  
AC

SOLID  
BRASS

IP  
54


LAMP  
HL-1 1 WATT LED  
HL-2 G4

## HL-1



### SPECIFICATIONS

Body Material	Solid Brass
Color Temp	2700K
Lead Wire	3' 18/2 UL
Lumen Output	80 lm

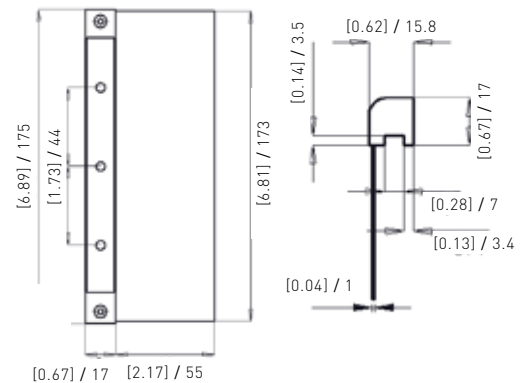


## HL-2



### SPECIFICATIONS

Body Material	Solid Brass
Max Wattage	35W
Lead Wire	3' 18/2 UL
Lens	Frosted

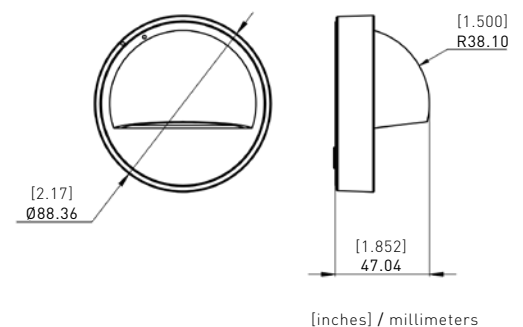

# PATH & AREA

12V  
AC

SOLID  
BRASS

IP  
54


LAMP  
G4

## AL1-S18



### SPECIFICATIONS

Body Material	Solid Brass
Max Wattage	35W
Lead Wire	6' 18/2 UL
Spike	PVC
Lens	Polycarbonate
Stem	18" w/stake and socket

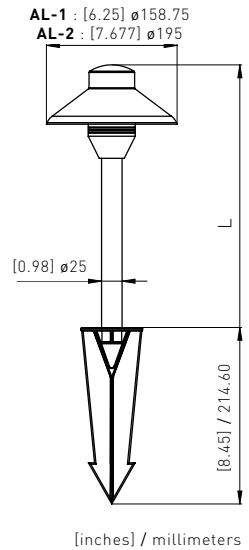

## AL2-S18



### STEMS

Stem extensions are available in two lengths and are ordered separately (Stems DO NOT include stake or socket and also work with OB series):

**S06** : 6"   **S12** : 12"   **S18** : 18"

12V  
AC

SOLID  
BRASS

IP  
54

LAMP  
G4


## AL3-S61



### SPECIFICATIONS


Body Material	Solid Brass
Max Wattage	35W
Lead Wire	10' 18/2 UL
Spike	PVC
Lens	Polycarbonate

This path light fixture has a removable top that reveals a kerosene wick. Fill the fixture with kerosene to illuminate without electricity. Or use a 12VAC G4 lamp.

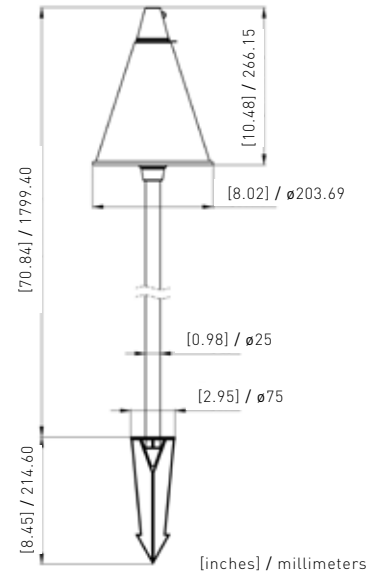

# LED LAMPS

Other configurations available. Inquire about availability.

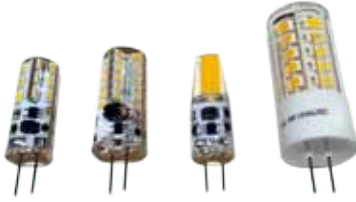

1.5 Watt 100 lm / 110 lm	1.2C Watt 120 lm / 130 lm	2 Watt 160 lm / 170 lm	2C Watt 200 lm / 205 lm	4 Watt 320 lm / 330 lm
-----------------------------	------------------------------	---------------------------	----------------------------	---------------------------

## G4 LED LAMPS

2800K / 4000K

	Wattage	Beam Spread	CRI	Color Temp	Lens*
<b>G4</b>	<b>01</b>	<b>OM360</b>	<b>8</b>	<b>28</b>	<b>C</b>
	01—1.5 Watt	OM360—360°	8—80	28—2800K	C—Clear
	01C—1.2 Watt			40—4000K	F—Frosted
	02—2 Watt				
	02C—2 Watt				
	04—4 Watt				

\*Only applicable to 01/2C lamps

## MR11 LED LAMPS

CREE XTE

3 Watt  
160 lm / 180 lm  
2800K / 4000K

	Wattage	Beam Spread	CRI	Color Temp
<b>MR11</b>	<b>03</b>	<b>XTE</b>	<b>SP45</b>	<b>8</b>
	03 - 3 Watt		SP20—20°	8—80
			SP45—45°	28—2800K
				40—4000K

## MR16 LED LAMPS

CREE XTE

3 Watt  
190 lm / 210 lm

5 Watt  
320 lm / 350 lm

7 Watt  
450 lm / 490 lm  
2800K / 4000K

	Wattage	Beam Spread	CRI	Color Temp
<b>MR16</b>	<b>03</b>	<b>XTE</b>	<b>SP20</b>	<b>8</b>
	03—3 Watt		SP20—20°	8—80
	05—5 Watt		SP40—40°	28—2800K
	07—7 Watt		FL60—60°	40—4000K
			FL120—120°	65—6500K

12V  
AC

STAINLESS  
STEEL

NEMA  
3R

UL/CUL  
LISTED

MAGNETIC  
TRANSFORMER

# OUTDOOR AC TRANSFORMERS

Control accessories available. Specialty transformers available. Inquire for more information.

## TR<sub>SERIES</sub>

### SPECIFICATIONS

#### TR-075 (75W)

Primary Voltage	120VAC—.625A Max
Output Voltage	12, 15VAC
Breakers	1x5A
Frequency	60 Hz
Dimensions	8¼" x 3¾" x 4½"
Weight	5.6 LBS

#### TR-150 (150W)

Primary Voltage	120VAC—1A Max
Output Voltage	12, 13, 14, 15 VAC
Breakers	1x15A
Frequency	60 Hz
Dimensions	15¼" x 4¾" x 5½"
Weight	15 LBS

#### TR-300 (300W)

Primary Voltage	120VAC—3A Max
Output Voltage	12, 13, 14, 15 VAC
Breakers	1x25A
Frequency	60 Hz
Dimensions	17" x 7½" x 5½"
Weight	23 LBS





**FOR MORE  
INFORMATION**

**Business Address**

22 Harcourt Road  
Rochester, New York 14606

[585] 254 – 8010 **PHONE**  
[585] 254 – 8033 **FAX**

[www.illuminfx.com](http://www.illuminfx.com)  
[info@illuminfx.com](mailto:info@illuminfx.com)

**COPYRIGHT**

Entire contents © illuminFx Lighting Systems.  
All rights reserved. illuminFx reserves the  
right to make changes to specifications at  
any time with or without notice.

Reproduction in whole or in part without  
permission is strictly prohibited.

