



Commercial

LINEAR

23 / 35 / 45 / 70W LED

LSM



LINEAR LSM :


The linear LED LSM from IFX offers great light output for general interior lighting applications. The shatterproof polycarbonate UV stabilized lens and sealed die-cast aluminum housing make them perfect for most environments.

- UL listed and DLC
- Optional motion sensor
- Standard 0-10V dimmable driver
- 50,000 hour lifespan / 5 year warranty

SPECIFICATIONS

| | | | | |
|---------------|------------------------|--------------|--------------|--------------|
| Wattage | 23 / 35 / 45 / 70W | | | |
| Efficacy | up to 130 lm/W | | | |
| Color Temp | 3000K / 4000K / 5000K | | | |
| Lumens | | 3000K | 4000K | 5000K |
| | 23W | 2900 | 3000 | 3050 |
| | 35W | 4450 | 4650 | 4700 |
| | 45W | 5850 | 6000 | 6050 |
| | 70W | 8900 | 9250 | 9400 |
| Power Factor | >0.95 | | | |
| CRI | >80 | | | |
| Input Voltage | AC100-277V 50/60Hz | | | |
| Housing | Die-cast aluminum | | | |
| Mounting | Surface or chain mount | | | |
| Warranty | 5 years | | | |

DIMENSIONS

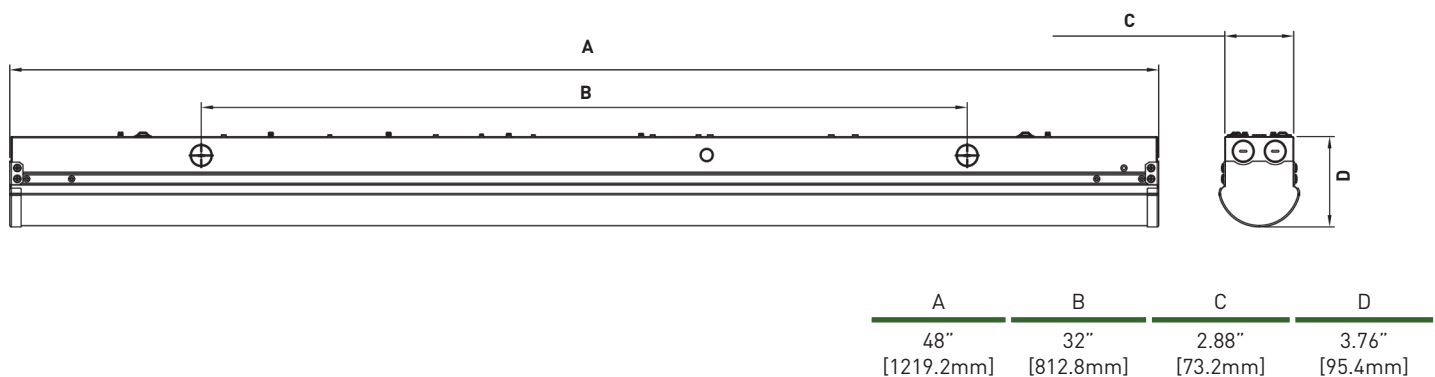

ORDERING GUIDE

example product code: LSM20-U840-WTIS

| SERIES | TOTAL WATTAGE | VOLTAGE | CRI | COLOR TEMP | FINISH | OPTIONAL* |
|--------|---------------|---------|-----|------------|--------|------------------|
| LSM | 20 | U | 8 | 40 | WT | IS |
| | 20-20 Watts | | | 50-5000K | | IS-PIR Sensor |
| | 35-35 Watts | | | 40-4000K | | B-Battery backup |
| | 45-45 Watts | | | 30-30000K | | |
| | 70-70 Watts | | | | | |

*Optional features. Select which you want and add to the end of the part #

