

RIO | oslo

SLIMFLEX

LED Tape Light

SFT

SPECIFICATIONS

Housing	Molded silicon sleeve
Voltage	Single Color —12V DC RGB —12 or 24V DC
Length	5m [16.7'] per reel
Cuttable	Single Color —Every ~2" RGB[12v] —Every ~4" [24v] —Every ~6.5"
Power	Single Color —24W [4.2W/m] RGB — 36W [7.2W/m]
Max Connection	10m [33.4'] [2 reels]
Current	Single Color —400mA/m RGB[12v] —600mA/m [24v] —300mA/m
Humidity	90% RH
Ambient Temp	-40°F ~ 140°F
CRI	>Ra80 (warm and cool white only)
Min. Buckling Radius	>50mm

ACCESSORIES (per reel)

End Cap	5	
Mounting Clip	15	




SLIMFLEX SFT :

The SlimFlex SF series high brightness product is a simple to use LED light strip. Anywhere that tape can go, so can the illuminFx LED SlimFlex line. Use under banisters, around stairs, under counters, as cove lighting, or as general accent lighting for almost any application. To make it as easy to use in all situations, SlimFlex is CUTTABLE. The single color strip is cuttable every 2" and the RGB strip is cuttable every 4/6.5".


- Long life Epistar LED
- 2 year warranty

DIMENSIONS

single color

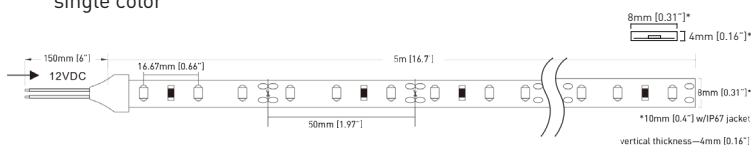

RGB

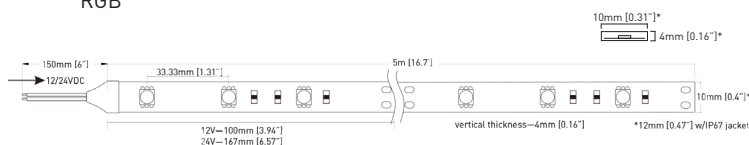

Model Number	Current	Watts/m	Color	Total Watts	Cord Termination	LUM Flux/m	Voltage
SFT35-60-1-824-67	2 amps/m	4.8W/m	Antique White 2400K	24W	2-wire	320	12Vdc
SFT35-60-1-828-67	2 amps/m	4.8W/m	Warm White 2800K	24W	2-wire	360	12Vdc
SFT35-60-1-830-67	2 amps/m	4.8W/m	Warm White 3000K	24W	2-wire	360	12Vdc
SFT35-60-1-865-67	2 amps/m	4.8W/m	Cool White 6500K	24W	2-wire	400	12Vdc
SFT35-60-1-B-67	2 amps/m	4.8W/m	Blue	24W	2-wire	70	12Vdc
SFT50-30-1-RGB-67	3 amps/m	7.2W/m	RGB	36W	4-wire	Variable	12Vdc
SFT50-30-2-RGB-67	3 amps/m	7.2W/m	RGB	36W	4-wire	Variable	24Vdc



illuminFx

illuminFx reserves the right to make changes to specifications at any time with or without notice