



RIO

SLIMFLEX

Digital

SFD

SPECIFICATIONS

Housing	IP20 / IP67—Molded silicon sleeve
Voltage	12V DC
Length	5m [16.7'] per reel
Cutttable	Every ~2"
Power	72W [14.4W/m]
Max Connection	10m [33.4'] [2 reels]
Current	12v—1200mA/m
Humidity	90% RH
Ambient Temp	-40°F ~ 176°F
Lumens	360 lm/M
Min. Buckling Radius	>50mm
IC Type	WS2811

ACCESSORIES (per reel/IP67 only)

End Cap	5	
Mounting Clip	15	

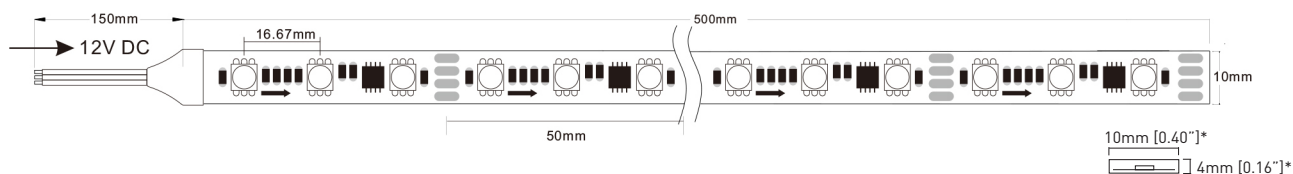




SLIMFLEX SFD :

The SlimFlex SFD line of SlimFlex is a DIGITAL LED strip that can be used with most SPI lighting controllers. Digital Strip allows you to have each section of the SlimFlex be a different color at the same time. This allows you to create chasing effects along the length of the SlimFlex.

- Long life Epistar LED
- 2 year warranty

DIMENSIONS



Model Number	Current	Watts/m	Color	Total Watts	Cord Termination	LUM Flux/m	IP Rating
SFD50-60-1-RGB-20	12 amps/m	14.4W/m	RGB 	72W	3-wire	360LM	20
SFD50-60-1-RGB-67	12 amps/m	14.4W/m	RGB 	72W	3-wire	360LM	67