

Flex Light

MINI SIDE
BENDING

NEOGLOW

NGS0408

NEOGLOW




Mini Side Bending NeoGlow is a flexible, low profile linear lighting product, perfect for applications requiring smooth illumination along a linear distance, like caps on seating walls, counter edges, steps, undercabinet, inside cabinet, deck railings and countless other applications.

- Features Designed for Professional Installation
- UL Listed
- Side bending
- Max run 16.4 Ft
- 2" cutting interval (2 silicone end caps included)
- 2M (78") Lead wire at each end
- Works on Standard 12VAC Landscape Lighting Transformer

SPECIFICATIONS

Wattage	1.8W/FT 6W/M
Input Voltage	12VAC
Efficacy	42 LM/W @3000K
Color temp.	2700K 3000K 4000K
Cutting Interval	50mm 2"
LEDs/meter	120
Lumens	2700K - 73LM/ft 3000K - 68LM/ft 4000K - 76LM/ft
CRI	90+
Max run:	16.4 ft 5M
Profile Dim. WxH	4mm x 8mm 0.16" x 0.32"
Environment	IP65
Housing:	Silicone Extrusion with milky white diffusor
Dimmable:	Yes
Warranty:	5 Years indoor 3 years Outdoor

DIMENSIONS

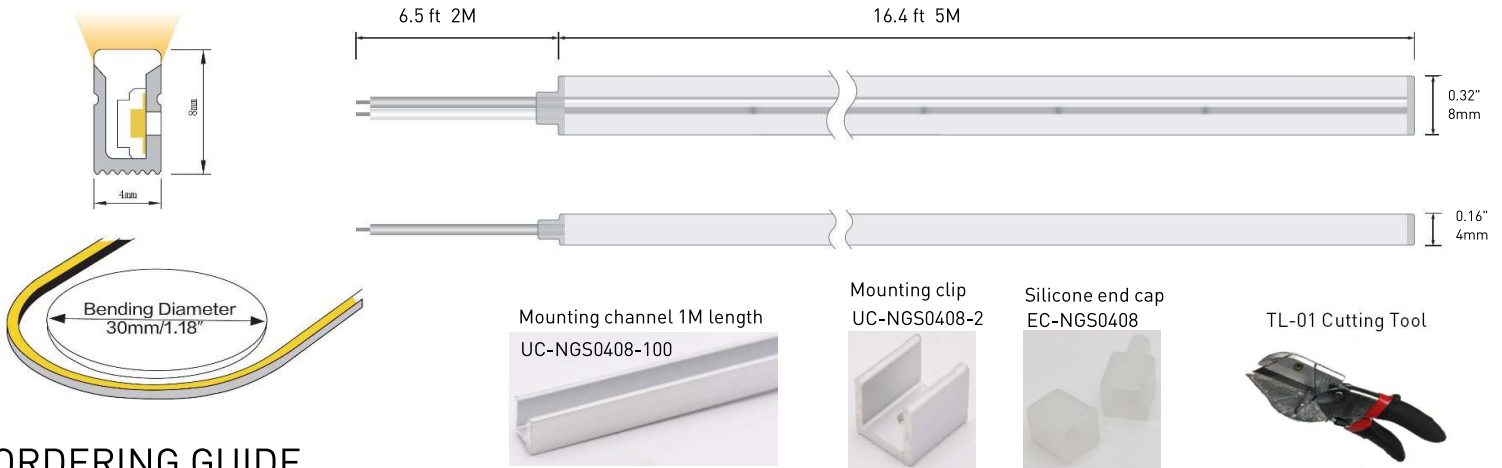

ORDERING GUIDE

SERIES	LEDs/M	INPUT VOLTS	CRI/CCT	IP RATING	REEL PKG LENGTH
NGS04F28	120	1A	930	65	5M
	120	1A - 12VAC	927 - 2700K	65 - IP65 Outdoor	5M - 5M length
		2D - 24VDC	930 - 3000K		CSTM - Custom Length
			940 - 4000K		

IlluminFx reserves the right to make changes to specifications at any time with or without notice



IlluminFx Lighting Systems
22 Harcourt Road | Rochester, NY 14606 USA
www.illuminfx.com | info@illuminfx.com | 585-254-8010
NGS04 e2401