


Flex Light

SIDE BENDING



NEOGLOW
RGB
NGS1120

NEOGLOW




Side Bending NeoGlow is a Flexible, low profile linear lighting product, perfect for applications requiring smooth illumination along a linear distance, like caps on seating walls, counter edges, steps, undercabinet, inside cabinet, deck railings and countless other applications.

- Features Designed for Professional Installation
- UL Listed
- Side bending
- Max run 32.9 Ft
- 3" cutting interval
- 2M (78") Lead wire

SPECIFICATIONS

Wattage	3W/FT 9.6W/M
Input Voltage	24VDC Constant Current
Light Output	380 Lumens/Meter
Color	RGB
Cutting Interval	62.5mm 2.5"
LEDs/meter	96
Wavelengths	Red - 620-625NM
	Green - 530-535NM
	Blue - 470-475NM
Max run:	32.9 ft 10M
Profile Dim. WxH	11mm x 20mm ~.43" x .78"
Environment	IP65
Housing:	Silicone Extrusion with milky white diffuser
Dimmable:	Yes
Warranty:	5 Years indoor 3 years Outdoor

DIMENSIONS

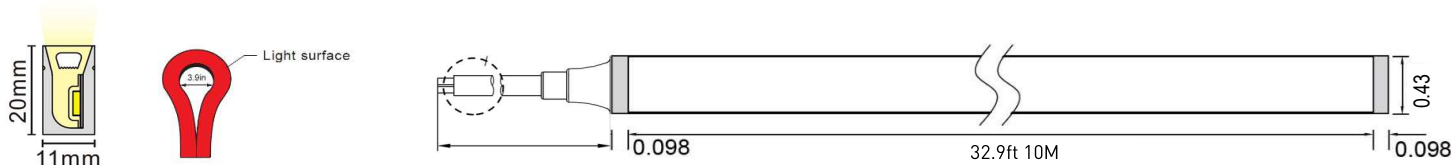

ACCESSORIES



ORDERING GUIDE

SERIES	LEDs/M	INPUT VOLTS	CRI/CCT	IP RATING	REEL PKG LENGTH
NGS1120	96	2D - 24VDC	RGB	65	10M
	96	2D - 24VDC	RGB	65 - IP65 Outdoor	10M - 10M length
					CSTM - Custom Length

IlluminFx reserves the right to make changes to specifications at any time with or without notice



IlluminFx Lighting Systems
22 Harcourt Road | Rochester, NY 14606 USA
www.illuminfx.com | info@illuminfx.com | 585-254-8010
NGS1120 RGB e2401