



# COLOR SELECT+

## RGB Wireless Controller

CSP




## COLOR SELECT PLUS

illuminFx's Color Select PLUS WiFi controllable color controller is a great choice for those that want more control over their light fixtures. With the Color Select PLUS, users can adjust their lighting fixtures wirelessly over WiFi with their smart phone. Simply install the free application, and begin changing the colors of your lights. You can select from 16.7 million different colors, and adjust the color changing modes. Select from one of the 12 fixed modes, and change the speed, or create your very own. You can choose your own colors and transitions in the DIY mode and save these as scenes for later use. Up to 4 scenes can be saved and later changed with one touch. The NEW WiFi104 also allows the ability to add extra zones so you can get different colors in different locations. For each zone past zone 1, add CSP-R45ACV wireless zone control receiver. You can also incorporate the all new WP4 interior wireless wall panel into the system.

### SPECIFICATIONS

Voltage	12~24VDC
Peak Output Power	144W@12V   288W@24V
Peak Output Current	3x4 Amps
WiFi Control	2.4GHz with selectable frequencies
Working Temp	-4°F~122°F
RGB Color Modes	12 Fixed modes, 12 DIY modes, 4 scenes
Dimensions	128mm x 73mm x 45mm
Output Control	Control over single color, warm/cool white temperature, Full RGBW

### Diagram

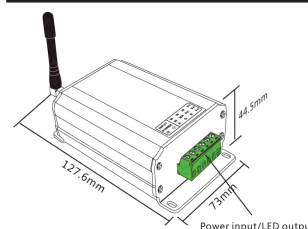

Weight	325g
Part Numbers	Main Unit : CSPWIF104 Zone Control : CSP-R45ACV Wall Panel : WP4 (comes with receiver)

### ZONE CONTROL

The WiFi 104 can control up to 12 zones WIRELESSLY. Each zone can be controlled independently or together using up to 4 groups. The zones can be different types of LED lights as well. For example, ZONE ONE could be RGB fixtures, ZONE 2 could be RGBW, and ZONE THREE could be a single color LED product. Each zone past zone 1 requires a CSP-R45ACV wireless zone control receiver.

### INTERIOR WALL PANEL

An optional wall panel can also be added wirelessly to the Color Select System. Use it to control up to 4 zones of RGB / RGBW lighting fixtures.



# WiFi 104 APP

## Quick Look




Available on the App Store  
scan to download ios app



Google play  
scan to download android app

### MAIN INTERFACE

The main interface gives you simple color over the color and brightness of the RGB lights. On RGBW mode you also gain control over the white LED on the fixtures. You can also set it for simple dimming control or control temperature tuning. All the changes can be made in seconds and controlling your lighting fixtures will be a breeze.

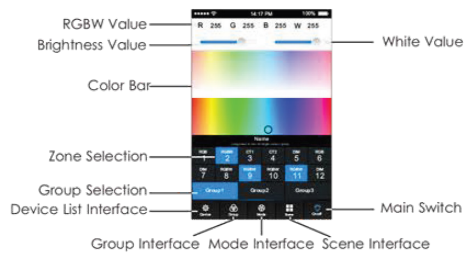


### DIY INTERFACE

The WiFi 104 app allows you to create up to 12 modes. You can select the colors and the order of colors you want for each mode. You can also select the speed and type of transition from each color to the next. You can also select certain modes and play them in succession with the playback loop feature.



### SETTING ZONES

This shows the quick process of changing and adding zones on your lighting project. Up to twelve can be added (additional CSP-R45ACV are needed for each zone past zone one)

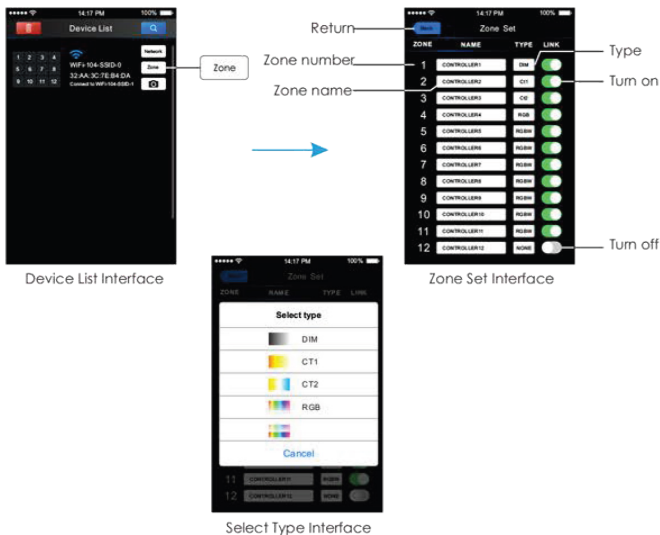

### WIRELESS DISTANCES

