


12V AC

TRANSFORMER

75/150/300/600W

TR

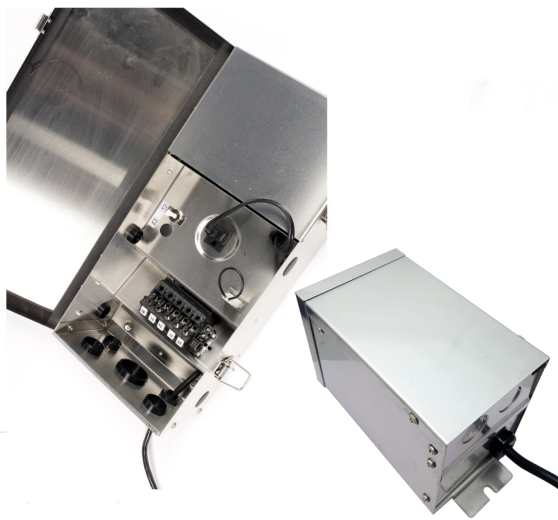

TRANSFORMER TR :

The TR series of low voltage transformers are a perfect solution for almost any landscape lighting job. Multi-tap 12-15VAC outputs allow for easy installation of multiple lighting fixtures at varying distances.

- Standard mandatory secondary protection
- Large secondary connection block for easy wiring
- 1/8" stainless steel Nema 3R case
- Comes standard with 6' power cord attached.
- Meets or exceeds UL, cUL, ANSI/UL, and CSA requirements
- Timer and Photocell ready. Sold separately

TIMER ACCESSORIES



ST-38424
Digital Timer

Works with

Standard digital timer. On and off w/once daily repeats

150, 300, 600W



PH-ST15
Photocell

Works with

Adjustable, broad surface photocell

75, 150, 300, 600W



GM-1/2
Astronomical Timer

Works with

Fully programmable WiFi astronomical timer. 3G/4G/WiFi

150, 300, 600W

SPECIFICATIONS

	TR-075	TR-150	TR-300	TR-600
Output Voltage	12, 15VAC	12-15VAC	12-15VAC	12-15VAC
Input Voltage	120VAC-0.625 Max	120VAC-1A Max	120VAC-3A Max	120VAC-5.5A Max
Breakers	1x25A	1x15A	1x25A	2x25A (dual 300W)
Frequency	60 Hz			
Dimensions (LxWxH)	19" x 14" x 12"	15.25" x 4.75" x 5.5"	17" x 7.5" x 5.5"	17" x 7.5" x 5.5"
Weight	5.6 LBS	15 LBS	20 LBS	29 LBS
Dimmable	Yes — With low-voltage magnetic dimmer			

Model Number	Output Voltage	Max Load	Input Voltage	Material	Dimensions	Weight
TR-075	12, 15VAC	75W	120VAC - .625A	SS Nema 3R	8.25" x 3.75" x 4.5"	5.6 LBS
TR-150	12-15VAC	150W	120VAC - 1A	SS Nema 3R	15.25" x 4.75" x 5.5"	15 LBS
TR-300	12-15VAC	300W	120VAC - 3A	SS Nema 3R	17" x 7.5" x 5.5"	20 LBS
TR-600	12-15VAC	600W	120Vac - 5.5A	SS Nema 3R	17" x 7.5" x 5.5"	29 LBS